


DS-6104HCI-SD Digital Video Server



Key Features

- High performance DSP hardware compression
- H.264 video compression
- Dual streams
- Support variable bit rate and frame rate
- Multi-zone motion detection and private masking
- Multi-level user access management
- SD card local storage option up to 32GB

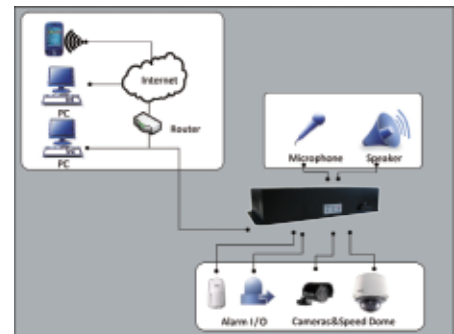

Specifications

		DS-6104HCI-SD
Video/Audio Input	Video compression	H.264
	Video input	4-ch
	Video input interface	BNC (1.0 Vp-p, 75 Ω), support PAL, NTSC
	Audio compression	OggVorbis, 16 Kbps
	Audio input	4-ch
	Audio input interface	BNC (2.0 Vp-p, 1 kΩ)
Video/Audio Output	Voice talk input	1 channel RCA (2.0 Vp-p, 1 kΩ)
	Recording resolution	4CIF / DCIF / 2CIF / CIF / QCIF
	Frame rate	4CIF @ 30 fps, 2CIF @ 4 fps, CIF @ 30 fps
	Stream type	Video / Video & Audio
	Support dual stream	Yes
	Video bit rate	32 Kbps ~ 2 Mbps, or user-defined (Max. 8Mbps)
External Interface	Audio output	1 channel RCA (Linear electrical level, 600 Ω)
	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface, 1 RS232 interface, 1 RJ45 interface and 1 RS485 interface
	SATA interface	1 interface for 1 SATA hard disk, the max capacity is 2000 GB
	Alarm input	4-ch
General	Alarm output	2-ch
	Power supply	110 - 240 V AC, 47 ~ 63 Hz
	Consumption	< 7 W (without HDD)
	Working temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)
	Working humidity	10% ~ 90%
	Dimension (WxHxD)	350 x 78 x 225 mm (13.79" x 3.07" x 8.87")
Weight (without HDD)	≤ 3500 g (7.72 lbs)	