

HS3000 Enclosure

HIGH SECURITY, INDOOR, CEILING/WALL MOUNT

Product Features

- Indoor Applications
- All-Steel Construction (14-Gauge)
- Wall or Ceiling Mounting
- 2 Window Ports to Choose From
- No Exposed Mounting Hardware
- Tamper-Proof Fasteners Secure Enclosure
- Tamper Switch Standard Feature




The **HS3000** is a high security camera enclosure designed for installations such as ATM bank machines, prisons, detention cells, etc., requiring maximum protection from vandalism.

Constructed from medium gauge steel, the enclosure is available in a 10-inch (25.40 cm) length. The **HS3000** will accept most cameras with fixed focal and varifocal length lenses. There is no exposed mounting hardware securing the enclosure to its mounting surface. Opening the enclosure can be accomplished only with a specially designed tool, eliminating the possibility of the enclosure being opened by unauthorized personnel. A factory-installed tamper switch is mounted on the secured access cover.

Designed to function as a wall or ceiling enclosure, the **HS3000** is versatile because it allows you to re-position the window to the opposite end of the enclosure should the viewing area requirements change. An impact-resistant, 0.25-inch (6.35 mm) thick, smoked Lexan® window is supplied with the enclosure for discreet surveillance.

An optional 120 VAC or 24 VAC heater kit is available.

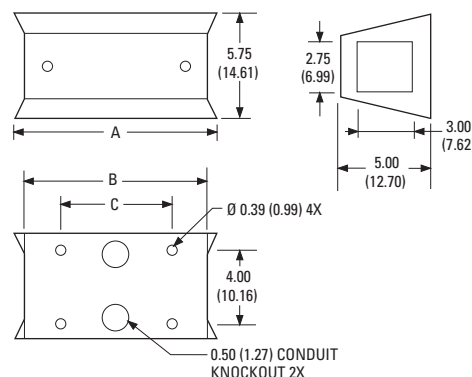

MODEL	A	B	C
HS3000	11.00 (27.94)	10.00 (25.40)	6.00 (15.24)

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.



TECHNICAL SPECIFICATIONS

MODEL

HS3000 High security camera enclosure, 10-inch (25.40 cm) lower body length, constructed from heavy gauge steel

MECHANICAL

Camera Mounting Adjustable tilt table

Maximum Camera and Lens Size Accepts camera and lens combinations* (including BNC connector) up to: 3.75" H x 3.25" W x 9.00" L (9.53 x 8.25 x 22.86 cm)

Window Viewing Area 2.75" H x 3.00" W (6.99 x 7.62 cm)

Enclosure Mounting Four 0.39-inch (0.99 cm) diameter holes on protected rear surface

Cable Entry Three 0.50-inch (1.27 cm) cable knock-out holes; two on flat mounting surface and one on end opposite viewing window

Security Two tamper-resistant screws (hollow Allen wrench supplied)

Tamper Switch Plunger type door switch with "pull-to-cheat" feature

*Assumes lens is fully extended.

ELECTRICAL

Tamper Switch 0.25-inch (0.63 cm) quick connect N.O./N.C.
10A maximum switching current
125 VAC maximum switching voltage

GENERAL

Window Smoked (1 f-stop attenuation), 0.25-inch (6.35 mm) thick Lexan®

Construction 0.074-inch (1.87 mm) thick, seam-welded 14-gauge steel

Finish Gray polyester powder coat

Environment Indoor; 32° to 120°F (0°C to 49°C)

Weight 7.36 lb (3.34 kg)

Shipping Weight 9 lb (4.07 kg)

CERTIFICATIONS/RATINGS

- UL Listed
- Meets NEMA Type 1 standards

OPTIONAL ACCESSORIES

Heater Kit	HKHS3000	Heater kit, 120 VAC, 30W Thermostatically controlled on at 40°F (4°C) and off at 60°F (15°C)
	HKHS3024	Same as HKHS3000 except 24 VAC



Pelco, Inc. Worldwide Headquarters:
3500 Pelco Way, Clovis, California 93612-5699 USA
USA & Canada Tel: (800) 289-9100 • FAX: (800) 289-9150
International Tel: +1 (559) 292-1981 • FAX: +1 (559) 348-1120
www.pelco.com

Pelco and the Pelco logo are registered trademarks of Pelco, Inc.
Lexan is a registered trademark of the General Electric Company.
Product specifications and availability subject to change without notice.
©Copyright 2005, Pelco, Inc. All rights reserved.