

KPC-HDB450

2.1 Mega Pixel Mini Bullet type Camera




• Features

2.1 Mega Pixel, 1/3" Panasonic CMOS
 1080p(1920x1080)@30fps (Standard)
 Min. Illumination of 0.1 Lux
 f=3.6,6mm Board Lens
 Digital Day & Night
 WDR, BLC, AGC, 3DNR, DSS
 Privacy Masking, Motion Detection / Convenient OSD
 HD-SDI (BNC) / Service Video Output
 DC12V

• Dimensions

(Unit : mm)

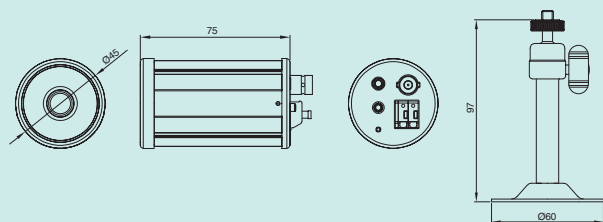

• Specifications

Model Name	KPC-HDB450
Image Device	2.1 Mega Pixel, 1/3" PANASONIC CMOS
Video Output mode	HD-SDI : 1080p@30fps, 720p@60fps TV Out : NTSC / PAL Selectable
Effective Pixels	1944(H) x 1092(V)
Unit cell size	2.75(H) x 2.75(V)
S/N Ratio	More than 50dB
Min. Illumination	0.1 Lux
Video output	HD-SDI / 1.0 Vp-p Composite (75Ω)
Lens	f=3.6, 6mm Board Lens
Shutter speed	Auto / Manual Selectable
WDR	OFF / WDR / BLC Selectable
BLC	OFF / WDR / BLC Selectable
AGC	Off / 0~23 dB
3DNR	OFF / LOW / MID / HIGH
White Balance	AUTO / MANUAL / PUSH-LOCK
Digital Zoom Ratio	1x ~ 20x
Digital Slow Shutter	Off, x2, x3, x4
Privacy Masking	On / Off
Motion Detection	On / Off
Day & Night	Digital Day & Night (AUTO / COLOR / BW)
OSD	Built-in with Joystick
Operating Temperature	14°F~112°F (-10°C~+50°C)
Storage Temperature	-4°F~140°F (-20°C~+60°C)
Humidity	Operating: Less than 80% / Storage: Less than 95%
Power Consumption	DC12V (±10%) Max. 160 mA
Dimension	Ø45 x 75
Weight	Approx.145g

• HD-SDI Repeater (Options)



Model Name	KR-200
Input	1ch HD-SDI (SMPTE 292M) Serial Video Input
Output	2ch equalized and reclocked HD-SDI (SMPTE 292M)
HD-SDI Type	75 Ω on BNC Connector
LED	Indication LED
Length	Max. 120m
Power	DC12V / AC24V Dual Voltage
Dimensions (mm)	74(W) x 72(H) x 46(D)