

GV-PA481 PoE Adapter

The GV-PA481 is a Power over Ethernet (PoE) adapter designed to provide power to the IP device through a single Ethernet cable. Adopting the PoE adapter enables you to mount an IP device anywhere in a building where power outlets are not available.

Packing List

1. GV-PA481 PoE Adapter x 1

Note: The AC Power Cord can be purchased upon request.

Applied to

GV-BX5300-E

GV-BX3400-E

GV-BX2400-E

GV-BX1500-E


GV-Hybrid LPR Camera 10R

GV-Hybrid LPR Camera 20R

Connections

Two Ethernet cables are required for the connection.

1. Connect one end of the first Ethernet cable into the **DATA IN** port on the GV-PA481, and the other end to the hub/router connecting to the computer which will be used to access the IP device.
2. Connect one end of the optional power cord into the Rear Panel on the GV-PA481, and the other end to the power outlet. The Power LED on the front panel of the GV-PA481 turns green now.
3. Connect one end of the second Ethernet cable into the **POWER & DATA OUT** port on the GV-PA481, and the other end to the IP device. The Active LED on the front panel of the GV-PA481 turns red now.

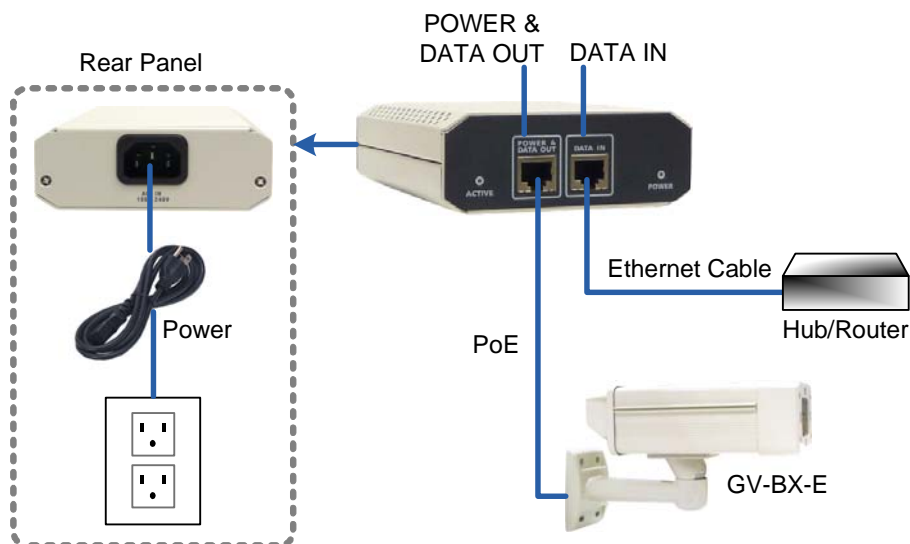

Specifications

PoE Standard	IEEE 802.3at Power over Ethernet / PD	
PoE Output (10 / 100 Out)	DC 48V, 1A (48 W Max.)	
Ethernet Cable Length	GV-Hybrid LPR Camera	Max 10 m (32.8 ft) from GV-PA481 to IP device, CAT5
	GV-IP Camera	Max 100 m (328 ft) from GV-PA481 to IP device, CAT5
Power Input	AC 100 ~ 240V, 2A	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Dimensions (L x W x H)	138 x 104 x 38 mm (5.43 x 4.09 x 1.5")	
Weight	610 g (1.34 lb)	

All specifications are subject to change without notice.