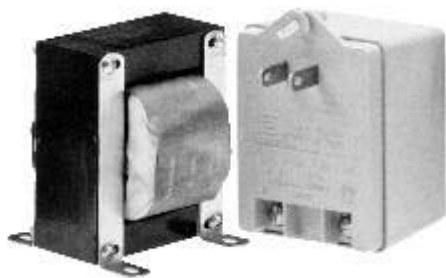


**ALARM SAF****TRANSFORMERS**

Open frame and plug in transformers in variable voltage ranges for use with AlarmSaf power supplies or for powering other low voltage devices.

**SPECIFICATIONS**

|                                                   |              | PRIMARY |         | SECONDARY |          |           |
|---------------------------------------------------|--------------|---------|---------|-----------|----------|-----------|
| Order #                                           | Model Number | Voltage | Current | Voltage   | Current  | VA        |
| CLASS 2 PLUG IN TRANSFORMERS                      |              |         |         |           |          |           |
| 00601                                             | T-16V15      | 120     | 0.15    | 16.0      | 0.90     | 15        |
| 00602                                             | T-16V50      | 120     | 0.50    | 16.5      | 3.00     | 50        |
| 00603                                             | T-24V40      | 120     | 0.50    | 24.0      | 1.60     | 40        |
| 00633                                             | T-12V20P     | 120     | 0.20    | 12.0      | 1.60     | 20        |
| CLASS 1 OPEN FRAME TRANSFORMERS, 120 VAC          |              |         |         |           |          |           |
| 00604                                             | T-12V3       | 120     | 0.50    | 16.5      | 3.00     | 50        |
| 00605                                             | T-24V3       | 120     | 0.80    | 28.0      | 3.00     | 85        |
| 00606                                             | T-12V5A      | 120     | 1.25    | 16.0      | 9.00     | 144       |
| 00607                                             | T-24V5A      | 120     | 2.50    | 29.0      | 7.50     | 218       |
| 00608                                             | T-12V10A     | 120     | 2.50    | 15.0      | 18.00    | 280       |
| 00609                                             | T-24V10A     | 120     | 4.00    | 26.0      | 15.00    | 390       |
| 00610                                             | T-12V20A     | 120     | 5.00    | 14.5      | 31.00    | 450       |
| 00611                                             | T-24V20A     | 120     | 6.50    | 26.0      | 25.00    | 650       |
| 00618                                             | T-24V4A      | 120     | 1.00    | 24.0      | 4.00     | 96        |
| 00629                                             | T-24V4W      | 120     | 1.00    | 24.0      | 4.00     | 96        |
| 00631                                             | T-29V120A    | 120     | 1.00    | 29.0      | 4.20     | 120       |
| 00632                                             | T-29V196A    | 120     | 1.60    | 29.0      | 6.50     | 190       |
| 00634                                             | TC-28V360    | 120     | 3.00    | 28.0      | 12.80    | 360       |
| 00635                                             | T-29V500     | 120     | 3.80    | 29.0      | 17.20    | 500       |
| 00637                                             | T-24V360     | 120     | 3.00    | 24.0      | 15.00    | 360       |
| 00638                                             | T-24V288     | 120     | 2.40    | 24.0      | 12.00    | 288       |
| CLASS 1 OPEN FRAME TRANSFORMERS, 240 VAC          |              |         |         |           |          |           |
| 00615                                             | TE-12V5A     | 240     | 0.75    | 16.0      | 9.00     | 144       |
| 00616                                             | TE-24V5A     | 240     | 1.25    | 29.0      | 7.50     | 218       |
| 00636                                             | TE-29V500    | 240     | 1.90    | 29.0      | 17.20    | 500       |
| CLASS 1 OPEN FRAME TRANSFORMERS, VARIABLE VOLTAGE |              |         |         |           |          |           |
| 00613                                             | T-32V260     | 120,240 | 2.00    | 11 to 29  | Variable | 66 to 174 |