

KB-ML-10WA – 10 Channel Master with Annunciation

Description

The **KB-ML-10WA** is a high-powered 10-channel master with tone signal and annunciator lights to announce incoming calls

Features

- Master presses one button to talk
- Master can listen to any/all stations hands-free
- Built-in background music/announcement capability
- High-powered master suitable for noisy and busy environments
- Sub-stations call by pressing one button, then speak hands-free
- Completely self-contained—no separate junction box or amplifier



Specifications

Construction:	Vinyl coated Steel
Dimensions:	10.50(267) W x 3.13(80) H x 8.75(222) D in(mm)
Weight:	7 lbs. (3.2kg)
Mounting:	Designed for desk mounting
Power:	120VAC required for 24VDC, 1 Amp power supply
Cable:	1 shielded pair needed for all sub-stations

Options & Accessories


5-Channel Master:	Order model KB-ML-5WA for a 5-channel master with all the same features
1-Channel Master:	Order model KB-LC-2W for a 1-channel master with all the same features
Paging Booster:	Model K-HP-50 provides 50 watts of power

Sub-Stations


With Call Button:	Model K-LR-3W flush mounts—use K-SM-L accessory to surface mount. Model K-LR-3 is a desk-style version of K-LR-3W .
Without Call Button:	Model K-LR-2R flush mounts—use K-SM accessory to surface mount. Model K-LR-2 is a desk-style version of K-LR-2R .
Cradle Phone:	Model K-S-112X provides clear communication and privacy in a noisy environment. Use with model K-C-20 horn speaker so master can call person at cradle phone location. Horn disconnects when cradle phone is picked up.
Horn Speaker:	Model K-C-20 furnishes up to 4 times the volume of sub-station K-LR-2R . Model K-C-20V includes built-in volume control.
High-Powered:	Model K-HP-3 is a 5 watt speaker for indoor use. Model K-HP-3V includes built-in volume control.
Ceiling Speaker:	Model S-8318B is an 8" ceiling speaker with white metal baffle and built-in volume control. For indoor use.
Gas Dispenser:	Model S-8304 is a built-in speaker for gas dispensers. No call origination or volume control.

KB-ML-10WA – 10 Channel Master with Annunciation

Dimensions

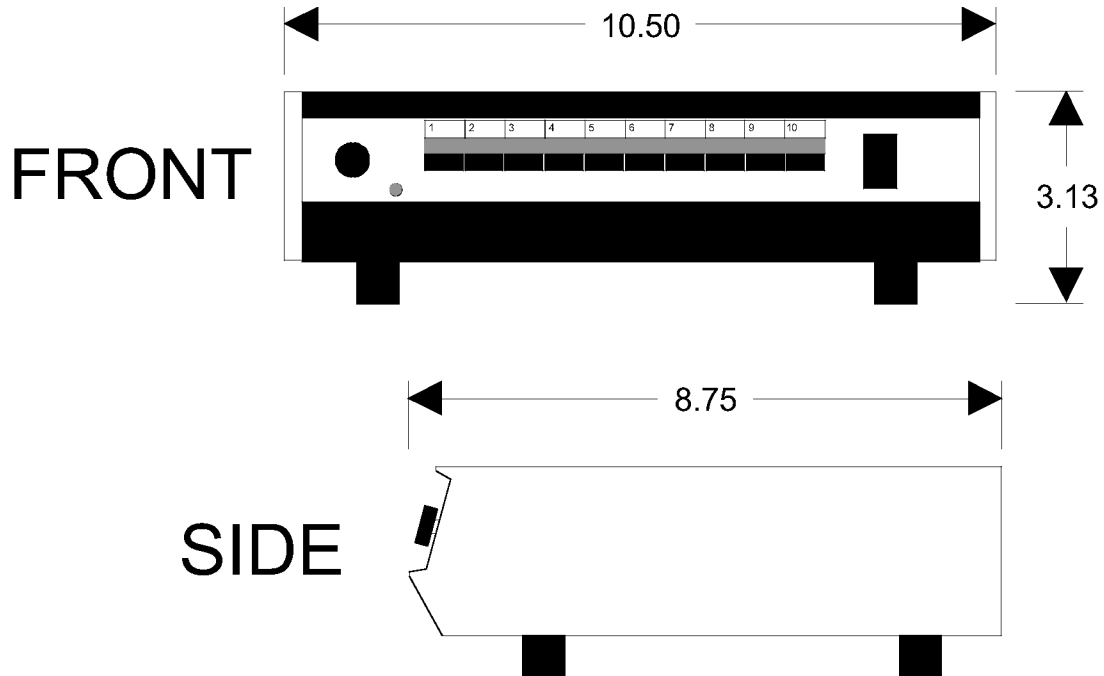

Sample Wiring

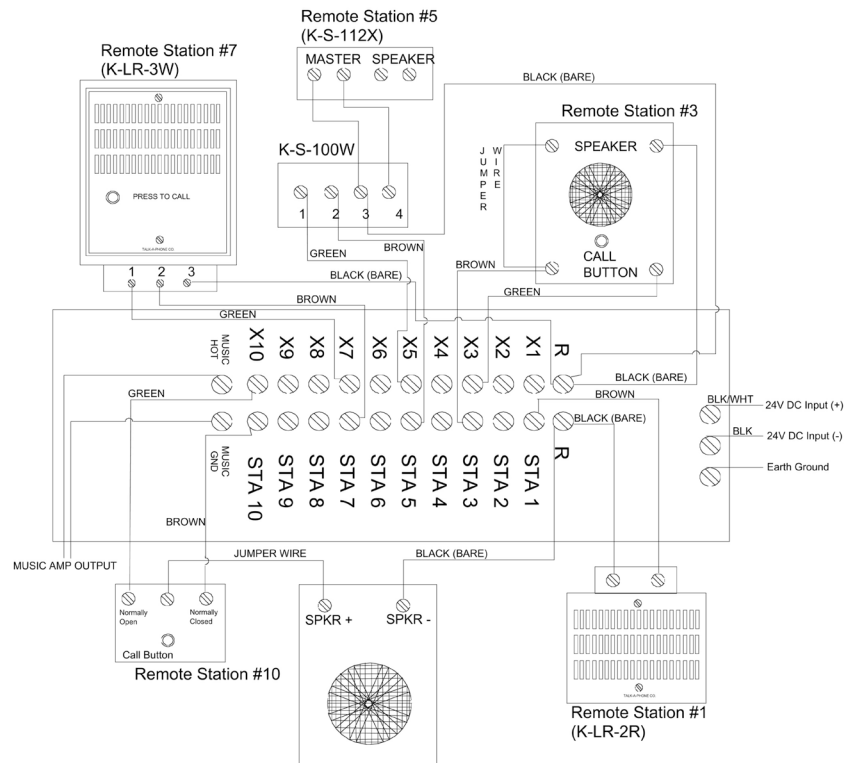

- Station 7 show how to connect a 3-wire Talk-A-Phone speaker with call button.
- Station 10 shows how to connect a 2-wire speaker with 3-wire call button.
- Station 3 shows how to connect a 2-wire speaker with 2-wire call button.
- Station 1 shows how to connect a 2-wire speaker without a call button.
- Station 5 shows how to connect a K-S-100W with a K-S-112X.

Copyright 2009 Talk-A-Phone Co. All rights reserved.

Talk-A-Phone Co. • 7530 North Natchez Avenue • Niles, Illinois 60714-3804
 Phone 773.539.1100 • Fax 773.539.1241 • info@talkaphone.com • www.talkaphone.com
 All prices and specifications are subject to change without notice.
 Talk-A-Phone, Talk-A-Lert, Scream Alert and WEBS are registered trademarks of Talk-A-Phone Co.