
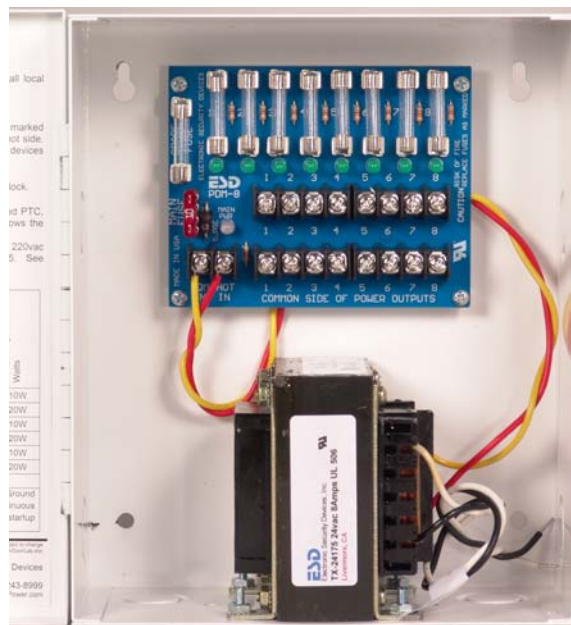


CCTV Multi-Output Power Supplies PDA Economy Series Life Time Warranty

PDA Economy Series Features:


- **2, 4 & 8 Amp Configurations**
- **4, 8 & 9 Output Configurations**
using PDM Output Modules with Fuses
or Circuit Breakers
- **Enclosure: 7.6" x 9" x 3.5"D**
- **Main Power Status LED (8 & 9 Output Models)**
- **Surge and Lightning Suppression (8 Output Models)**
- **Output Status LED's for Each Output**
- **Main Fuse/Power Pull with Handle**
- **Transformers are  506**
Line Cord and Wire Nuts Provided
- **Quality Manufactured in the USA**

PDA-8EST8



Description

The (ES) small enclosure CCTV Power Supplies provide an economical source of centralized 24vac for installations that require 4 to 8 Amps with 4 to 9 outputs. For more power or outputs see our standard or large PDA series. These central outputs can power multiple fixed cameras or pan-tilt cameras with heaters. The table below is a list of standard (ES) configurations with default fuse values. If you wish to use auto resetting circuit breakers, just add a "C" at the end of the part number and we will substitute the equivalent PTC for the fuses. Each 8 output power distribution module has a 1500-watt surge protector to help save your cameras from lightning and power surges. The small enclosure has seven (7) combination 1/2" and 3/4" knockouts for ease of installation. The table below list the default values for fuses and circuit breakers, any of our standard values may be substituted upon request.

 PDA Economy Series Specification and Selection Table	Protected Outputs	Total Output Amps	Output Fuses agc /Circuit Breakers	Output Status LED's	Main Fuse ATO/ Main with PTC's	Main Power LED's	Spike and Noise Suppression	Power Required Watts
PDA-4EST2	4	2A	500ma	Yes	Switch	No	No	110W
PDA-4EST4	4	4A	2A/1.4A	Yes	Switch	No	No	110W
PDA-4EST8	4	8A	4A/3A	Yes	Switch	No	No	220W
PDA-8EST4	8	4A	2A/3A	Yes	5A/20A	Yes	Yes	110W
PDA-8EST8	8	8A	2A/3A	Yes	10A/20A	Yes	Yes	220W
PDA-9EST4	9	4A	2A/1.4A	Yes	5A/20A	Yes	No	110W
PDA-9EST8	9	8A	2A/3A	Yes	10A/20A	Yes	No	220W
Input: 115vac – 230vac available on request Add "C" to part number for PTC auto-resetting fuses Line Cord with wire nuts are provided					All Outputs are isolated from Primary & Ground Current ratings are continuous 150% brief overloads are allowed for startup			



Electronic Security Devices
6111 Southfront Road, Suite J
Livermore, CA 94551

03/05 © Technical Literature jdb specifications subject to change
\\products\pd8\PDAEconTechSales.doc

Manufacturers of High Quality Security Devices

Phone: (925) 243-8990 Fax: (925) 243-8999
ESD@SecurityPower.com www.SecurityPower.com