

HD-TVI / 960H, Full HD 1080p Indoor Dome Camera


True D/N, DWDR, 1/2.9" Sony CMOS Sensor, 3DNR, UTC, 2.8~12mm

TVI / 960H

FEATURES:

- ◆ Full HD 1080p Resolution
- ◆ HD-TVI & 960H Selectable Main Output
- ◆ 12VDC/24VAC Dual Voltage Power
- ◆ Sony Progressive Scan CMOS
- ◆ True Day/Night Mechanical IR Cut Filter
- ◆ Digital Wide Dynamic Range
- ◆ 3-Axis Wall or Ceiling Mountable
- ◆ White & Black Housing Covers Included
- ◆ Sense-up / Slow Shutter Speed
- ◆ UTC & Joystick Controllable OSD
- ◆ 3D Digital Noise Reduction
- ◆ 2.8 ~ 12mm Varifocal Auto Iris Lens
- ◆ Video Test Output & Cable (960H)
- ◆ Manual 360° Horizontal Rotation
- ◆ Lined Dome Cover
- ◆ Included Wall Mount

CAMERA OVERVIEW:

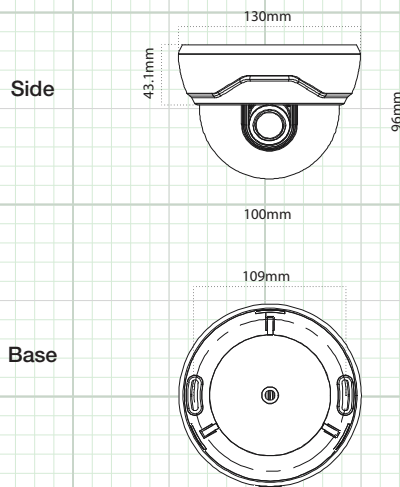

INCLUDED ACCESSORIES:

1. User Manual
1. Mounting Hardware Packet
1. Video Test Cable
1. Wall Mount
1. White Housing Cover



TVID212
Shown with White Cover
(included)



TVID212
Shown with Wall Mount
(included)

SPECIFICATION	TVID212
Image Sensor	1/2.9" Sony CMOS Sensor
Total Pixels	2010 (H) x 1108 (V)
Active Pixels	1944 (H) x 1092 (V)
Resolution	Digital: 1920 x 1080 (1080p), 1280 x 720 (720p) / Analog: 700TVL
Scanning System	Progressive Scan
OSD (Dual Access On Screen Display)	Internal Joystick Controlled / UTC (coaxial control)
Digital WDR (Wide Dynamic Range)	High / Middle / Low / OFF
3D DNR (Digital Noise Reduction)	High / Middle / Low / OFF
Video Output	HD-TVI & 960H Selectable Main Output, 960H Video Test Port
Lens Type - True Day Night	2.8 ~ 12mm Varifocal Auto Iris Lens
Sense-up	OFF / x2 - x8
Shutter Speed	Auto / Manual (1/30 ~ 1/60,000)
IR Cut Filter	Built-In Mechanical
Minimum Illumination	Color 0.002 Lux, B/W 0.001
S/N Ratio	More than 50dB (AGC OFF)
Automatic Gain Control	0 ~ 20 Steps
Sync System	Internal / External (L/L)
Gamma	$\gamma = 0.45$ typ.
White Balance	Auto / Autoext / Manual
Back Light Compensation	BLC (H/V Position & Size) / OFF
HLC (High Light Compensation)	ON / OFF
Day/Night	Auto_CDS / Color / B&W
Mirror	Rotate / V-Flip / H-Flip / Off
Digital Zoom	ON / OFF (x1 ~ x8)
Languages	English / French / Spanish / German / Italian
Brightness	Adjustable 0 ~ 20
Motion Detection	ON / OFF
Privacy Mask	ON / OFF (16 Zone Selectable)
Power Input	12VDC/24VAC Dual Voltage Power
Power Requirement	Max 300mA
Reverse Polarity Protection	Yes
Overall Camera Dimensions	5.2" (W) x 3.8" (H)
Weight	Approx. 1.1lb
Operating Temperature	14°F ~ 122°F
Weatherproof Rating	Indoor Only

Note: Specification subject to change without notice