


12VDC High-Amp Power Supply

PS-D1610-PUQ 16 Outputs, 10A@12VDC, PTC Fuses, 3A per output

Features:

- ▶ Output voltage can be adjusted with potentiometer to compensate for voltage drop (12.6~14VDC)
- ▶ Each output is individually fused
- ▶ Output fuses rated 3A@250VAC
- ▶ Individual red status indicator LED for each output
- ▶ Main power switch to turn on/off power to outputs
- ▶ 6-ft power cord included
- ▶ Heavy-duty steel housing to protect power connections
- ▶ Removable steel cover for easy access
- ▶ Ventilation holes to prevent heat build-up
- ▶ Knock-out on the cover for an optional cam lock
- ▶ Built-in backup battery charger. Automatically switches to backup battery in case of power loss.

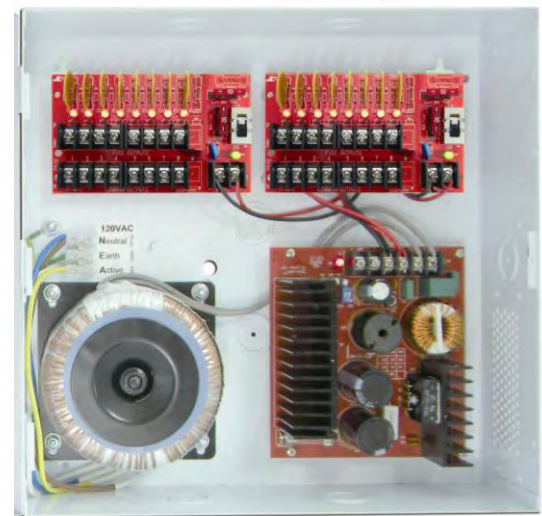

Specifications:

Fuse type	PTC*	
Operating voltage	12VDC	
Number of outputs	16	
Input	120 VAC, 60Hz	
Output	6/12/24 VDC	
Output voltage range	6VDC	5.9~8.9VDC
	12VDC	12.6~14VDC
	24VDC	27.6~29.5VDC
Output fuses	3A@250VAC	
Main fuse	10A@250VAC	
Max. supply current	6VDC	10A
	12VDC	10A
	24VDC	5A
Dimensions	12 1/8 x 12 1/4 x 3 5/8" (308 x 311 x 91 mm)	

*Positive Temperature Coefficient

Sample Application:

