

M215LED

21.5" LED monitor

Features


- HDMI, VGA (D-Sub 15 pins) and BNC video inputs
- 1920(H) x 1080(V) HD 1080p resolution
- Built-in speakers
- Convenient front controls for screen programming
- Input signal detection provides easy connection
- 290cd/m2 brightness
- 16:9 display ratio
- 500:1 contrast ratio
- Displays up to 16.7 million colors
- Regulated 12VDC 5.0 amp (UL & CSA listed power supply included)
- VESA compatible
- 1 year warranty

Specifications

Composite Output	BNC 1
Composite Input	BNC 1
Single Connector	VGA x 1, RCA x 2, PC Audio x 1, HDMI x 1
Speaker	1W+1W
Display Mode	VGA / BNC / PC / HDMI
AC Power	AC 100 - 240V 50/60Hz
Operating Temperature	14° F – 122° F
Storage Temperature	-4° F – 140° F
Power Consumption	25W
OSD Control	HDMI, VGA, Audio, PIP, System
OSD Languages	English
Auto Adjustment	Yes
De-interlace	Yes
Wall Mount	Optional
Accessories	Remote, Adaptor, Power Cord, Manual, VGA cable, PC Audio Cable
Safety	FCC, CE, RoHS
Tilt	10°-15°
Humidity	20% – 85%
Monitor Scan	Microprocessor controlled
Pixel Pitch	0.24825 (H) x 0.24825 (V)
Pixel Format	1920 x 1080
Response Time	5ms
Color Depth	16.7 million colors
Viewing Angle	Left 85° / Right 85° / Up 80° / Down 80° CR > 10
Display Area	18.41" (H) x 10.56" (V)
Dimensions	20.31" (W) x 16.20" (H) x 2.17" (D)
Weight	7.94 lbs.



ECO-FRIENDLY - LOW ENERGY
CONSUMPTION GREENER THAN LCDs

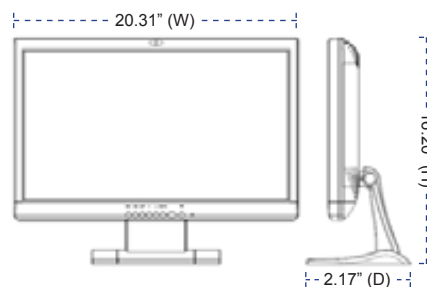

Optional Accessory



LCDVLW2
10" Extension Arm

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 10/23/13

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com