

DS-D5032FC-A

32" LCD Display Monitor



Hikvision's DS-D5032FC-A 32-inch LCD Display Monitor provides excellent color rendition and enhanced, 1920 x 1080 resolution. Spread-Spectrum technology reduces EMI radiation, and standby mode w/no signal input along with the ability to set the sleep time make this monitor green energy friendly.

The DS-D5032FC-A is constructed of high-quality components and materials for 24/7 use.


Available Models:
DS-D5032FC-A

- 3-D Digital Comb Filter
- True Color OSD and User-Friendly Menu
- 1 Channel HDMI 1.4 Input Interface, HDCP
- 3D Noise Reduction Technology
- Programmable 12-bit RGB Gamma Correction
- Mstar ACE-5 Auto Color and Image Enhancement Engine, Improved Image Contrast, Detail, and Edge
- Spread-Spectrum Technology Reduces EMI Radiation
- Highly Reliable Component for 24/7 Work
- Green Energy: Standby Mode w/No Signal Input, Set Sleep Time

Specifications

DS-D5032FC-A	
Display Type	TFT-LED backlight
Screen Size	31.5"
Dot Pitch (H×V)	0.12125 mm x 0.36375 mm
Resolution	1920 x 1080
Brightness	300 cd/m ²
Contrast	1000 : 1
Response Time	8 ms
Color	16.7 M
Viewable Area (H×V)	698.40 mm x 392.85 mm
Viewing Angle	Horizontal 178°, vertical 178°
Interfaces	DVI Input
	VGA Input
	HDMI Input
	BNC Input
	BNC Output
	USB
	PC AUDIO-IN
	PC AUDIO-OUT
Speaker	2 W x 2, 6Ω
VESA	100 mm x 100 mm
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	≤45 W
Operating Temperature	0° to 40° C
Operating Humidity	10% to 85% (no condensation)
Storage Temperature	-20° to 60° C
Bezel Material	Plastic
Dimensions (W×H×D)	728.8 mm x 526 mm x 167.2 mm
Package Dimensions (W×H×D)	803 mm x 513 mm x 197 mm
Weight	9.25 kg (gross weight), 5.75 kg (net weight)
Included Accessories	Power cord x 1, VGA cable x 1, HDMI x 1, remote control x 1, battery x 2, user manual x 1, warranty card x 1, base bracket x 1

Interfaces

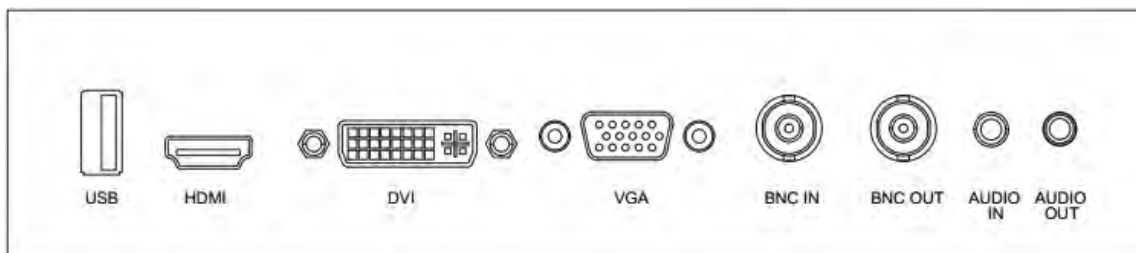

Dimensions

