



Embedded DVR Main Features:

- ❖ Low profile, Hi performance DVR with HDMI output
- ❖ Enhanced H.264 compression algorithm save HDD space & low bandwidth
- ❖ 400/480 fps recording for CIF and special 2 channel 4CIF Real time recording
- ❖ Multiple control methods: Front panel, IR remote controller, keyboard, USB mouse and network keyboard
- ❖ Real time live display up to 16 cameras with 720P high definition
- ❖ Variable frame recording on event with Hi Resolution switching
- ❖ Dual encoding streams support, flexible for network transmission and mobile phone monitoring
- ❖ Alarm triggering, OSD, siren, PTZ preset, e-mail, FTP upload
- ❖ Pentaplex function: live, recording, playback, backup & remote access
- ❖ 4, 8 and 16 Channel simultaneous real time playback
- ❖ Networking access for remote live viewing, recording, playback, setting, system status, event log
- ❖ Smart video motion detection, camera mask, video loss
- ❖ Smart camera settings: privacy masking, camera lock, color setting, and title display, virtual fence, smart motion search
- ❖ PTZ cameras up to 60 protocols supported
- ❖ 3D mouse control for PTZ Cameras
- ❖ Powerful 64 channel network software: built-in web server, multi-DVR client, mobile surveillance software for smart phone & CMS

Powerful Time Grid Search Function like PC Based DVR

HDMI®
HIGH-DEFINITION MULTIMEDIA INTERFACE



64 Channel NVR Client
with IP & Megapixel camera integration included


Embedded DVR Technical Specifications

Model	4 ch		8 ch		16 ch	
System						
Main Processor	Ultra fast Hi performance embedded micro processor					
Operating System	Embedded LINUX - Optimized					
System Resources	Pentaplex function: live, recording, playback, backup & remote access					
User Interface	GUI, on-screen menu tips, Grid search					
Control Device	Front panel, USB mouse, keyboard, IR remote control, network keyboard					
Input Method	Alpha numeric / Denotation					
System Status	HDD status, data stream statistics, log record, bios version, on-line user etc.					
Video						
Video Input	4 channel, BNC, 1.0Vp-p, 75Ω, looping		8 channel, BNC, 1.0Vp-p, 75Ω, looping		16 channel, BNC, 1.0Vp-p, 75Ω, looping	
Video Output	1 channel TV output, BNC, 1.0Vp- p, 75Ω, 1 VGA output, 1 HDMI output					
Video Standards	PAL(625Line, 50f/s), NTSC(525Line, 60f/s)					
Video Compression	Format		NTSC		PAL	
	D1(4CIF)		704 X 480		704 X 576	
	CIF		352 X 240		352 X 288	
	QCIF		176 X 120		176 X 144	
Video Recording	CIF/QCIF: PAL 1f/s~25f/s, NTSC 1f/s~30f/s					
	2CIF: PAL 12f/s / NTSN 15f/s					
	4CIF: PAL 6f/s / NTSC 7.5f/s					
	Dual video encoding streams supported					
	D1@30fps only on Ch1 for 4 channel DVR		D1@30fps only on Ch1 for 8 DVR		D1@30fps only on Ch1 & Ch9 for 16 channel DVR	
Video Display Split	1 and 4 view		1, 4, 8 and 9 view		1, 4, 8, 9, and 16 view	
Sequential Display	Supported					
Image Quality	1~6 level(level 6 is the best)					
Privacy Masking	4 self-defined four-sided zones for privacy masking for each camera					
Camera Lock	Camera locked for users					
Camera Adjustment	Adjust color according to different time period day/night					
Video Information	Camera title, time, video loss, camera lock, motion detection, recording					
TV Output Adjustment	Adjust TV output color & display zone					
Audio						
Audio Input	4 channel, BNC, 200-2800mV, 30KΩ		8 channel, BNC, 200-2800mV, 30KΩ		4 channel, BNC, 200-2800mV, 30KΩ	
Bidirectional Talk Input	1 channel, BNC, 200-2800mV, 30KΩ, same with the 1 st channel					
Audio Output	1 channel, BNC, 200-3000mv, 5KΩ					
Audio Compression	Optimized G.711 Compression					
Video Detection & Alarm						
Motion Detection	Micro Grid and 396 (22*18) detection zones Sensitivity: 1~6 (level 6 is highest) Record, preset, PTZ, alarm, pop-up, email, FTP					
Video Loss/Camera Mask	Trigger recording, PTZ movement, tour, alarm, email					
Alarm Input	4 channel, programmable, ground, manual open/closed Trigger recording, PTZ movement tour, alarm, email		8 channel, programmable, ground, manual open/closed Trigger recording, PTZ movement tour, alarm, email		16 channel, programmable, ground, manual open/closed Trigger recording, PTZ movement tour, alarm, email	
Relay output	3 channel, 30VDC, 1A, NO/NC, form-C		3 channel, 30VDC, 1A, NO/NC, form-C		3 channel, 30VDC, 1A, NO/NC, form-C	
Hard Disk						
HDD Space	1 SATA HDD up to 2TB					
HDD Management	Audio: 14.4MB/H Video: 56 ~ 500MB/H					
	HDD-fault, low disk space					
Auxiliary Interface						
USB Interface	2 ports, 1 for mouse control, 1 for backup					
RS232	Keyboard, PC communication					
RS485	PTZ control					

Model	4 ch	8 ch	16 ch
Network			
Interface	RJ-45 Port (10/100M)		
Network Function	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Email, Alarm Server, RSTP, RTP		
Remote Operation	Monitor, PTZ control, playback, system setting, file download, log information		
Record, Playback & Backup			
Recording Mode	Manual, continuous, motion detection, camera mask, video loss, area detection, alarm input		
Recording Priority	Manual >Alarm >Video Detection >Continuous		
Recording Interval	1 to 120 minutes (default: 60 minutes), Pre-record up to 30 seconds, Post-record up to 5 minutes		
Overwrite Mode	Supported FIFO		
Micro Grid Search	Time/Date, Alarm, Motion Detection, area search, exact search (accurate to second)		
Playback	4, 8 and 16 channel playback simultaneously, pause, stop, rewind, fast play, slow play, next file, previous file, next camera, previous camera, full screen, repeat, shuffle, backup selection		
Digital Zoom	Selected zone can zoom into full screen during playback		
Backup Mode	Flash disk/ USB HDD/ USB CD/DVD-RW/ / Network download		
Environmental			
Power Supply	220V 50Hz / 110V 60Hz		
Power consumption	25W		
Working Temperature	-10° ~ +55°		
Working Humidity	10% ~ 90%		
Atmosphere Pressure	86kpa~106kpa		
Dimension	1U, 375mmx285mmx45mm (W*D*H)		
Weight	2.35KG(without HDD)		
Mounting	Desktop		
Integration			
ATM	All major ATMs integrated through Network		
POS	Text Display & Alarm Search Supported		

All product specifications on this brochure are subject to change without notice.

Model Reference Chart

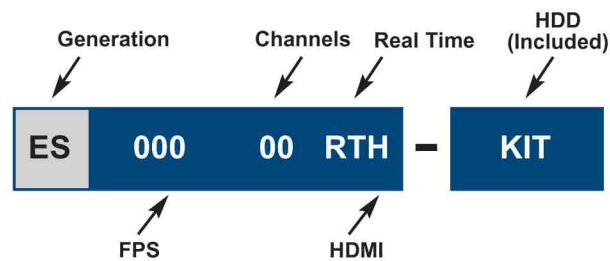

Connection Diagram

