


# 7201 SERIES HI INTENSITY LEDS

## WATER PROOF SERIES

### 7201xL2-HWR


1 GANG STAINLESS STEEL PLATE  
2 HI-INTENSITY WATER PROOF LED'S

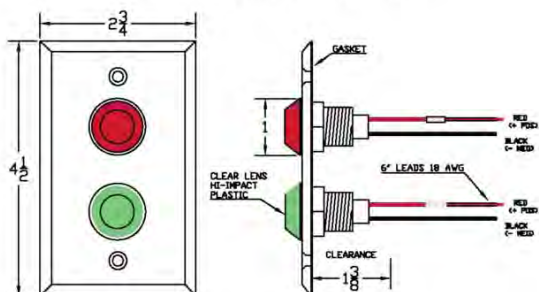

## INDOOR SERIES


### 7201xL2-H

1 GANG STAINLESS STEEL PLATE  
2 HI-INTENSITY LED'S

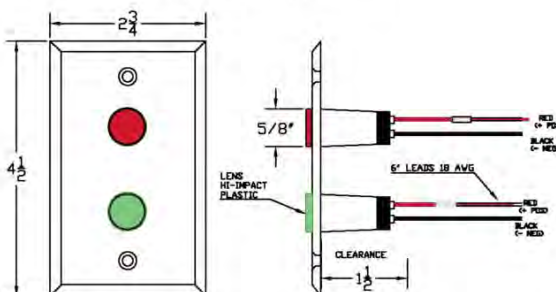



### 7202xL2-HWRxCSW

2 GANG STAINLESS STEEL PLATE  
2 HI-INTENSITY WATER PROOF LED'S  
1 WATERPROOF PIEZO SOUNDER



### 7201xL1-HWRxCSW

1 GANG STAINLESS STEEL PLATE  
1 HI-INTENSITY WATER PROOF LED'S  
1 WATERPROOF PIEZO SOUNDER



## Example Model Descriptions

- 7201xL1-H = 1 High Intensity LED mounted on a 1 gang Stainless Steel Plate
- 7201xL2-H = 2 High Intensity LEDs mounted on a 1 gang Stainless Steel Plate
- 7202xL2-HxCS = 2 High Intensity LEDs with continuous Piezo sounder mounted on a 2 gang Stainless Steel Plate
- 7201xL1-HWR = 1 High Intensity Water Proof LED on a 1-gang Stainless Steel Plate
- 7201xL2-HWR = 2 High Intensity LEDs Water Proof LEDs on a 1-gang Stainless Steel Plate
- 7202xL2-HWRxCS = 2 High Intensity Water Proof LEDs with Water Proof Piezo sounder mounted on a 2 gang Stainless Steel Plate

## Ratings

LEDs - Rated .04 Amps @ 12 - 24 VDC.  
Nylon Body with Polycarbonate lens

-HWR Water Proof series has gaskets behind each LED and Plate

Piezo Sounder - **Standard indoor**  
Rated 20 mA @ 3-28 VDC.  
Sound Pressure- 100 dBA @10 cm (Min.)  
Resonant Frequency- 4500 Hz

Piezo Sounder - **Water Proof**  
Rated 35 mA @ 12 VDC.  
(not available in 24VDC)  
Sound Pressure- 95 dBA @10 cm (Min.)  
Resonant Frequency- 2800 Hz

Gang Plates - Stainless Steel 304  
US23D Satin Finish  
1-Gang 4-1/2 x 2-3/4"  
2-Gang 4-1/2 x 4-1/2"  
Narrow 4-1/2 x 1-3/4"

## Specifications

High Intensity LED Indicators shall be manufactured by Dortronics Systems, Inc. Furnish 7200 series LED indicators using standard indoor or weather-resistant exterior units as may be appropriate. Exterior mounted indicators shall have sealing gaskets behind each LED and between the mounting plate and the junction box.

Where noted, supply Dortronics optional indoor style piezo sounder or optional weather-resistant outdoor piezo sounder.

Mounting plates shall be constructed of #304 stainless steel US23D Satin Finish in single or double gang and supplied with optional paint filled engraving as noted. Attachment screws shall be slotted oval head stainless steel. For extra security, pin-in-hex head tamper-resistant screws shall be supplied where required.