



DESCRIPTION

The JP-DVF-PR is a vandal-resistant door station for the JP Series with a built-in AC-PROX-1G proximity card reader. The door station can either be surface or flush mounted. The intercom portion of the JP-DVF-PR connects to a JP-4MED master station with a 2-conductor, 18-AWG wire, and the reader connects to an access control system with a standard Wiegand connection.

The JP-DVF-PR features a PTZ camera and a backlit directory strip. The camera offers a 170-degree field of view, as well as an LED for low light illumination. The station calls to the master station when the button is pressed.

The AC-PROX-1G is a 125kHz Wiegand proximity reader. It features up to a 6" non-contact read range. It is compatible with Aiphone 40-bit credentials, as well as certain HID®, AWID®, and Pyramid credentials. The reader requires a connection to a compatible access control system.


FEATURES

- PTZ camera
- White LED for low light illumination
- Flush mount with included back box
- Stainless steel panel
- Illuminated directory
- Built-in proximity card reader

JP-DVF-PR

Flush Mount Video Door Station with Proximity Card Reader

FEATURE CALL-OUT

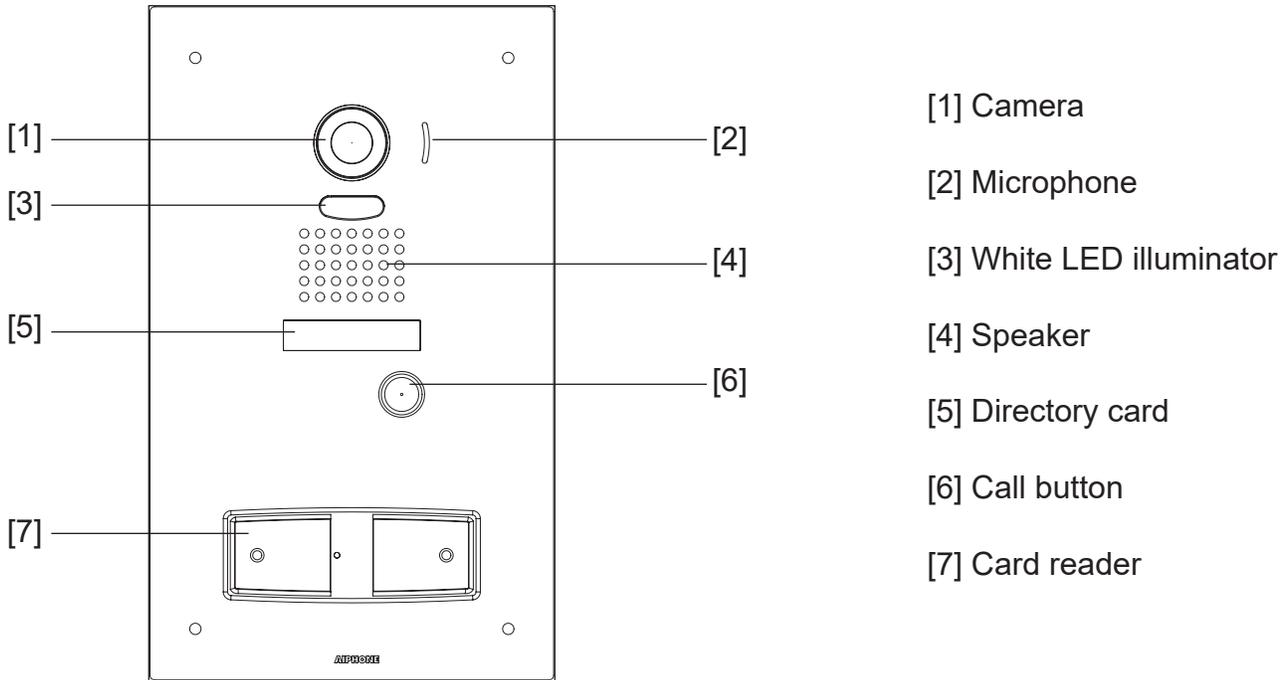

DOOR STATION SPECIFICATIONS

Power Source:	24V DC (supplied from JP-4MED master station)
Communication:	Open voice hands-free
Camera:	1/4" color CMOS
Min. Illumination:	5 lux
Wiring:	18-gauge 2-conductor
Wiring Distance:	330'
Operation Temp:	-4°~140°F (-20°~60°C)
Dimensions:	11-11/16" H x 7" W x 2-1/16" D

CARD READER SPECIFICATIONS

Power Input:	5~14V DC
Power Draw:	45mA
Frequency:	125kHz
Certifications:	CSA, FCC, CE, C-Tick