



## DESCRIPTION

The IXG-DM7-HIDA is an IP video entrance station for the IXG Series. It is equipped with a 7" LCD directory screen that is used for calling a tenant or entering an access entry code. Up to 9,999 names/numbers can be stored in the station.

A motion sensor will activate the screen when the visitor approaches. Once a call is placed, the visitor will be displayed on the tenant station or app using the 720p HD camera. A T-coil hearing aid will be able to pick up audio signals from the station.

The station includes a built-in HID® card reader for card access. It supports Prox or iCLASS® 26 bit and 37 bit cards, and Corporate 1000® 35 bit and 48 bit cards. The station can also act as an independent access control panel for the built-in HID reader.


## FEATURES

- 7" touchscreen
- 802.3af PoE
- On-board recording with microSD™ card
- Simple user interface
- T-coil hearing aid compatible
- Hands-free audio communication
- 1.23 megapixel fixed video camera
- Up to 9,999 names/numbers can be stored
- Programmable contact inputs and outputs
- Motion sensor to activate LCD
- Built-in HID reader for card access
- Stainless steel panel
- Rugged IP65 and IK08 ratings
- Tamper sensor

# IXG-DM7-HIDA

## IP Video Entrance Station

### FEATURE CALL-OUT

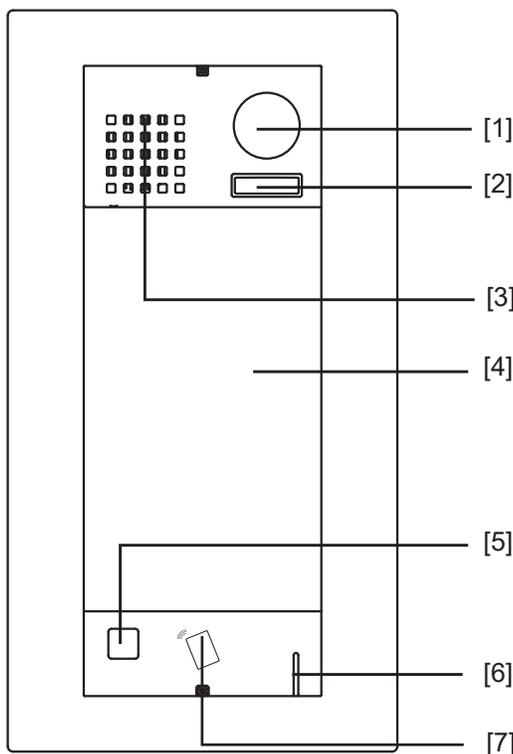

### FEATURE CALL-OUT LEGEND

- [1] Camera
- [2] White LED
- [3] Speaker
- [4] LCD Touch Screen
- [5] Sensor
- [6] Microphone
- [7] HID® card reader

### SUB STATION SPECIFICATIONS

<b>Power Source:</b>	PoE (IEEE 802.3af class 0)
<b>Power Draw:</b>	5.3W standby, 11.6W max
<b>Screen:</b>	7" TFT display
<b>Monitor Resolution:</b>	800 x 400
<b>Communication:</b>	Full-duplex
<b>Audio Codec:</b>	G.711 (μ-law, A law)
<b>Video Codec:</b>	H.264
<b>Protocols:</b>	IPv4, IPv6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP, RTCP, IGMP, MLD, SMTP, SFTP, DHCP, NTP, DNS, TLS
<b>Port Security:</b>	IEEE 802.1X
<b>Operation Temp:</b>	-22°~140°F (-30°~60°C) Built-in Form C relay:
<b>Dimensions:</b>	13-11/16" H x 7-3/16" W x 2" D
<b>HID Reader Card Types:</b>	High Frequency (13.56MHz) HID iClass, SEOS, HID iClass SR, HID iClass SE, HID MIFARE Classic, HID Mifare DES Fire EV1 Low Frequency (125kHz) HID Proximity, Indala Proximity
<b>Card Format:</b>	H10301 (26-bit Weigand) H10302/H10304 (37-bit Wiegand) 35bit/48bit Corporate 1000