

Commercial


Featured Product

During lightning strikes or power

surges, voltage can flow through the reed switch of a magnetic contact—fusing the switch and rendering windows and doors unprotected. For the surge protection you need, look to Honeywell's robust XTP contacts.

→ Look for contacts featuring the “XTP” symbol throughout this section!

XTP

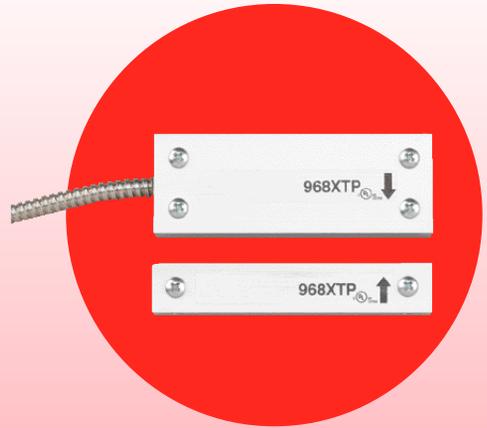

Commercial
968XTP Shown

Honeywell

Commercial



XTP

968XTP

968XTP High Security Switch

- Defeat-resistant from external magnetic tampering
- Includes tamper switch to notify of removal
- XTP protection (up to 2400VDC)
- Suitable for Indoor/Outdoor use
- Epoxy sealed for protection from moisture and corrosion
- 3' (91cm) stainless steel armored cable

ORDERING:


968XTP – High Security Balanced Switch

SPECIFICATIONS:

Switch Type: Form C (SPDT) Reed

Contact Rating: 125ma @ 24VDC

250ma @ 12VDC

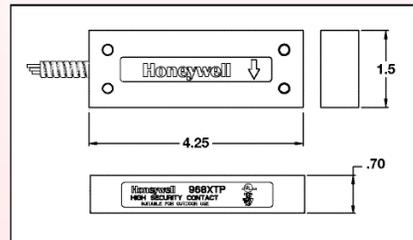


Patent # 4,945,340

REPLACES:

- Sentrol 2507AH-L, 2707A-L

Commercial

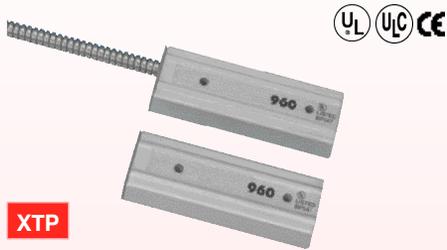

XTP

960 **XTP Surface Mount** **Magnetic Contact**

- XTP contacts withstand surges up to 2400VDC
- The toughest commercial contact ever developed
- Rugged aluminum housing
- Completely immersion proof (epoxy sealed)
- 3' (91cm) armored cable is standard
- Wide gap of 2-1/2" (64mm) is standard

ORDERING:

960 – SPST Switch (Form A)


960-2 – SPDT Switch (Form C)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed (960)

Switch Type: Form C (SPDT) Reed (960-2)


Contact Rating: 100ma @ 28VDC

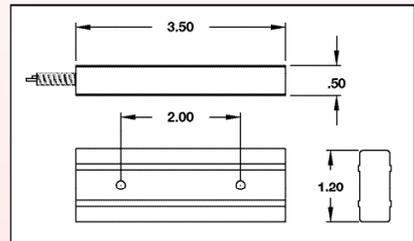

REPLACES:

- GRI 4400
- Nascom 505A
- Sentrol 2505A

Commercial



XTP

7945

XTP Surface Mount Magnetic Contact with Leads

- XTP contacts withstand surges up to 2400VDC
- 6' (1.8m) CLII cable is standard
- Completely immersion proof (epoxy sealed)
- Wide gap of 2-1/2" (64mm) is standard

ORDERING:

7945WH – White

7945BR – Brown

7945GY – Grey

7945-2GY – SPDT Switch (Form C)

7945WH-M – Spare magnet

7945BR-M – Spare magnet


7945GY-M – Spare magnet

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed (7945)

Switch Type: Form C (SPDT) Reed (7945-2)

Contact Rating: 100ma @ 28VDC

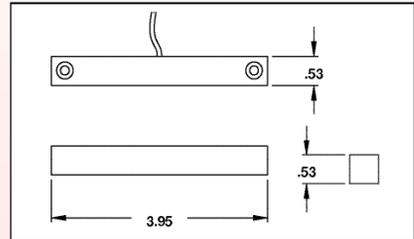

REPLACES:

- Amseco AMS37
- GRI 400, 410
- Sentrol 1045

Commercial



MPS80 Surface Mount Contact with Terminals

- Standard gap 2" (51mm)
- Industrial surface mount
- Includes spacers and mounting screws

ORDERING:


MPS80WGW – White

MPS80WGB – Brown

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 300ma @ 30VDC

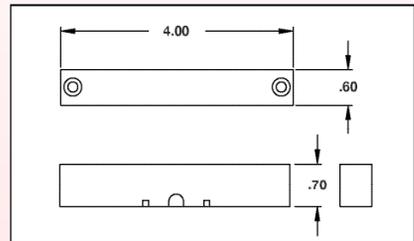

REPLACES:

- Amseco AMS37
- GRI 400, 410
- Sentrol 1045

Commercial



957

Overhead Door Magnetic Contact

- Rugged cast aluminum housing for protecting magnet
- Armored cable standard on every model (18") (46cm)
- Standard gap: 1" (25mm) minimum
- Unobtrusive design resists damage in high traffic areas

ORDERING:


957 – Standard gap 1" (25mm) minimum

957W – Wide gap 2" (51mm) minimum

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed


Contact Rating: 100ma @ 28VDC

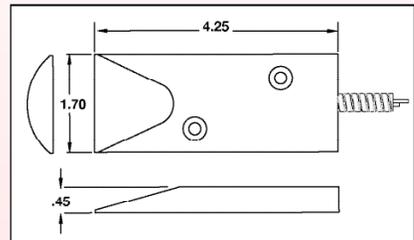

REPLACES

- Sentrol 2205A-L, 2205AO-L

Commercial

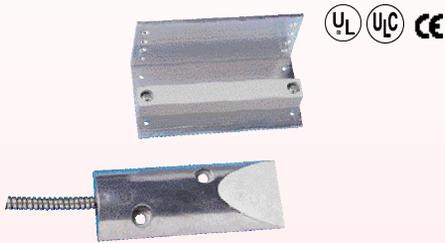

958

Overhead Door Magnetic Contact

- Adjustable magnet with L bracket
- 24" (61cm) armored cable is standard
- Standard gap: 2-3/8" (60 mm) minimum
- Epoxy sealed for protection from moisture and impact
- Rugged "Shock Absorber" design protects reed against flex or damage to housing

ORDERING:

958 – SPST Switch (Form A)


958-2 – SPDT Switch (Form C)

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed (958)

Switch Type: Form C (SPDT) Reed (958-2)


Contact Rating: 100ma @ 28VDC

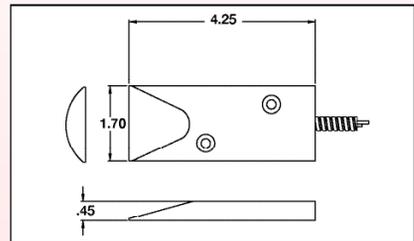

REPLACES:

- Aleph PS-2023
- Amseco ODC59A
- GRI 4532/4532L
- Sentrol 2202AU-L, 2202A-L, 2204AU-L

Commercial

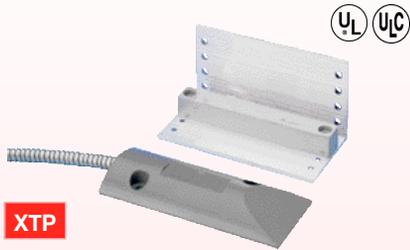

XTP

959

XTP Overhead Door Contact

- XTP contacts withstands surges up to 2400VDC
- The standard for OHD contact applications
- Adjustable magnet with L bracket
- Standard gap: 2" (51mm)
- Exceeds UL transient test withstanding surges up to 2400 Volts


ORDERING:

959 – Overhead Door Contact

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed

Contact Rating: 100ma @ 28VDC

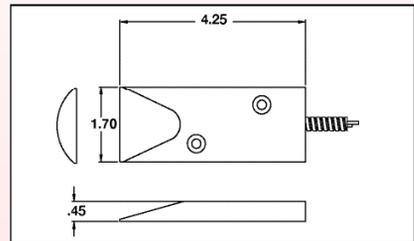

Commercial



MPS51C Overhead Door Contact


- Standard gap 2" (51mm)
- Form C
- 24" (61cm) armored cable
- Adjustable magnet bracket

ORDERING:

MPS51C – Overhead Door Contact

SPECIFICATIONS:


Switch Type: Form C (SPDT) Reed
Contact Rating: 300ma @ 30VDC

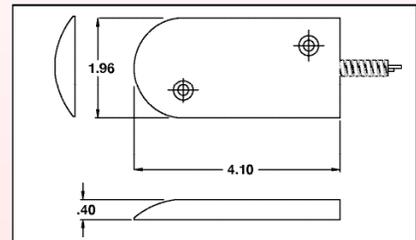

REPLACES:

- GRI 4532/4532L
- Sentrol 2202AU, 2202A

Commercial



MPS52 Overhead Door Contact


- Standard gap 2" (51mm)
- 24" (61cm) armored cable
- Adjustable magnet

ORDERING:

MPS52 – Overhead Door Contact

SPECIFICATIONS:

Switch Type: Form A (SPST) Reed
Contact Rating: 300ma @ 30VDC

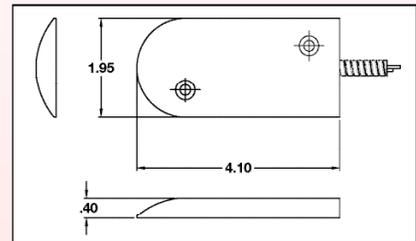

REPLACES:

- Amseco ODC59A
- GRI 4532/4532L
- Sentrol 2202AU, 2202A