



www.sdcsecurity.com service@sdsecurity.com
[t] 800.413.8783 805.494.0622 [f] 805.494.8861
801 Avenida Acaso, Camarillo CA 93012 • PO Box 3670, Camarillo CA 93011-3670


100 / 200 Conventional Mortise Bolt Lock



110/210 Series

110IV Failsafe
210HV Failsecure


The failsafe 110 and failsecure 210 are the most basic bolt locks available. The bolt assembly is adjustable forward up to 1" (25.4mm) past the face plate to accommodate wide door gaps or special applications (see figures 1 & 2).
Not for use in wood frames.

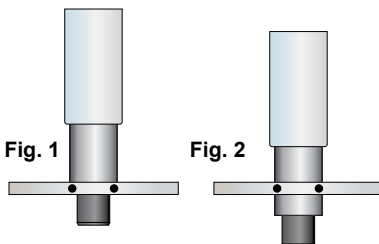

160/260 Series

160IV Failsafe
260HV Failsecure

The failsafe 160 and failsecure 260 bolt locks are equipped with an auto relock switch that keeps the bolt retracted when the door is open and causes the door to lock when closed. The auto relock switch and the bolt assembly are both adjustable for wide door gaps. (see Fig. 3 & 4).
Not for use in wood frames.

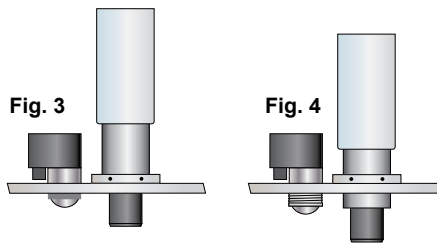

Specification

Electrical Specifications

Voltage: Dual 12/24VDC
450mA @ 24VDC
900mA @ 12VDC

Mechanical Specifications

Finish: 628 Anodized Aluminum

Faceplate: 2-3/4H" x 1-1/4W" x 0.25"D
(69.85 x 31.75 x 6.35mm)

Strike: 2-3/4H" x 1-1/4W" x 0.125"D
(69.85 x 31.75 x 3.175mm)

Bolt: 5/8" dia. x 1/2" throw
(15.87mm x 12.7mm)

Depth: 5" (127mm)

5 YEAR LIMITED WARRANTY



SECURITY DOOR CONTROLS

sdsecurity.com
service@sdsecurity.com

