

Technical Data Sheet

VIC-6 Video Interface Control By Draper

USES:

The VIC-6 replaces the standard single-station control switch for all screens or shades where a 6 volt trigger circuit is turned on to lower the product, and turned off to raise the product.

COMPATIBILITY:

The VIC-6 is intended as the sole control, and cannot be used with any other control, except the optional override switch (VIC-OS).

Please Note: If VIC-6 is built-in, VIC-OS cannot be used.

CONTACTS:

Single-Pole, Double-Throw (Common, Normally Closed, Normally Open).

RATING:

Contacts: 240 VAC, 7 A; 120 VAC, 7.5 A; 30 VDC, 7 A. UL, CSA recognized.

Coil: 6 VDC

Requires 100 MilliAmps input

DESCRIPTION:

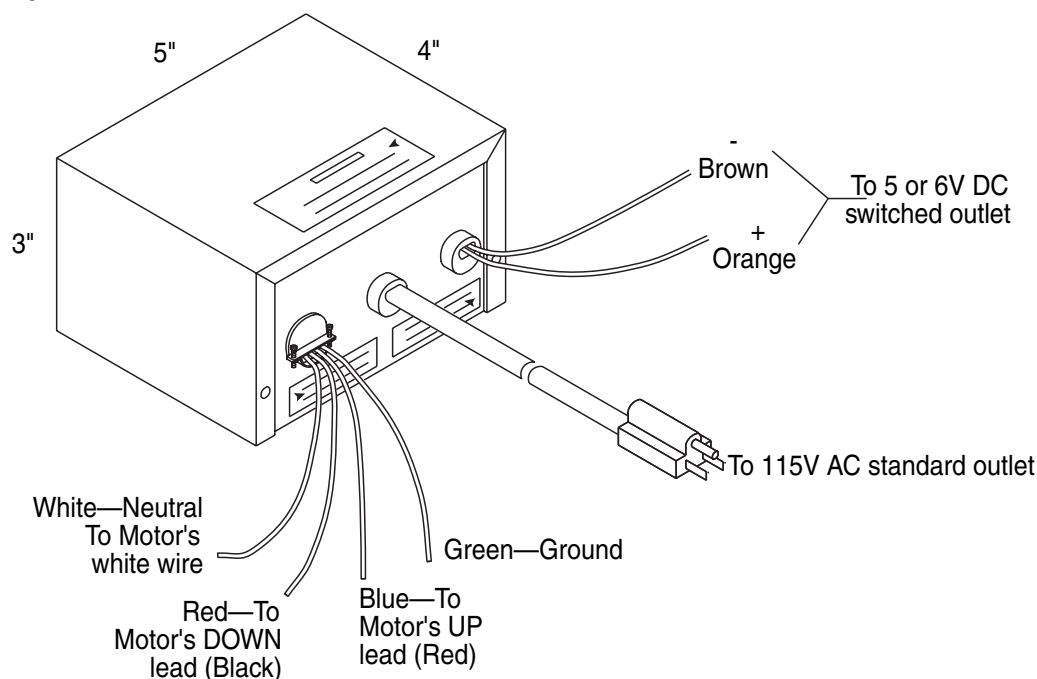
A relay with COM/NC/NO contacts, and a 6V coil, housed in a metal box.

Box measures 3" x 4" x 5" and has three pigtails leading from it:

- A 7½ ft. black cord with 3-pronged plug for constant 115V AC.
- Two 22" wire leads (orange & brown) for switched 6V DC.
- Four 6" wire leads for the motor: blue, red, white, green (up, down, neut., grnd).

PART NUMBER:

121025

ILLUSTRATION:

DRAPER®

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999
www.draperinc.com ■ fax 765-987-7142

Copyright ©2009 Draper Inc. Form VIC-6_TechDataSheet09 Printer in U.S.A.