

220X Zoom PTZ Camera 480TVL, 1/4" Color SONY CCD

Features


- 1/4" Color Sony super HAD CCD
- 480 TV Lines, 0.03 Lux / 0.005 Lux (DSS on)
- Auto iris, F1.6~3.8, f = 3.9 ~ 85.8 mm
- 220X zoom (22X optical zoom, 10X digital zoom)
- Support ICR function, 128 Preset positions
- 1 Auto cruising track
- AC24V power supply HOUSING
- External weather proof
- Built-in 24V heater and blower



ITEM # SP-607

Specifications

- | | |
|-------------------------|---|
| • Video Signal Output | 1.0 Vp-p / 75ohm (Video 0.714Vp-p / Sync 0.286Vp-p) |
| • Image Sensor | 1/4" Sony super HAD CCD |
| • Horizontal Resolution | 480 TV Lines |
| • AGC | Auto (24 dB Max) |
| • ALC | Auto / Fix |
| • AES | Auto / Fix |
| • BLC | On / Off |
| • White Balance | Auto (ATW or AWB) |
| • Optical Zoom | 22X Zoom |
| • Digital Zoom | 10X Zoom |
| • Focus | Auto / Manual |
| • Position | 128 Position (Zoom, Focus) |
| • External Control | RS-485 |
| • OSD Control | Zoom, Focus, Iris, AWB, AGC, Position |
| | C Gain, APC Gain |
| | Manual H.Gain & V Gain |
| • Enhancer | Off / On |
| • H/V Reverse | Off / On |
| • Mask | Off / On |
| • Language | English / Chinese / Japanese |
| • Cross Line | Off / On |
| • Freeze | Off / On |
| • Picture Effect | Posi. / Nega |
| • Pan Range | 0~360°, Speed 0.5~260°/sec |
| • Tilt Range | 0~90°, Speed 0.5~120°/sec |
| • Auto Panning | 128 Preset Positions (Max) |
| • Auto Cruising | 1 Auto Cruising Tracks(Max) |
| • Power Source | AC 24V |
| • Operating Temperature | 32 °F ~ 140 °F |
| • Humidity | 10% ~ 90% |

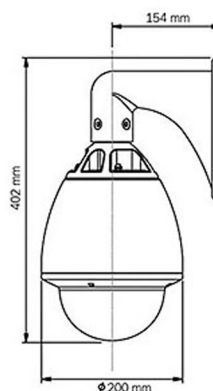

Simply line up the speed dome and twist into place



Once in place tighten the screws to lock the dome in place; it's that simple!

