

LED FULL HD 1080p



Public View Display w/ **WDR Built in Camera**

SPECIAL FEATURES

- 1920 x 1080p Full HD
- LED Backlight Unit
- Built-In 1/3" Sony Double SCAN CCD
- PIP / PBP Multi Display Function
- 3D Comb Filter / Deinterlace
- Video 1 In / 2 Out, S-Video 1 In, VGA 1 In, HDMI 1 In, Audio 1 In, PC Stereo 1 In
- 0.4 Lux with F1.2 Lens


SPECIFICATIONS

		23PVMV
Display	Screen Size	23 Inch
	Max. Resolution	1920 x 1080 @ 60Hz
	Pixel Pitch	0.265 mm x 0.265 mm
	Brightness	250cd/m²
	Contrast Ratio	1000 : 1
	Aspect Ratio	16 : 9
	Viewing Angle	176° / 170°
	Display Color	16.7 Million
	Response Time	< 5ms
	Video System	NTSC / PAL
Interface	Video In / Out (BNC Type)	1 / 2 (Include Camera Out)
	S-Video In / Out	1 / 0
	VGA In (15Pin D-Sub)	1
	HDMI In	1
	Audio In (RCA Type)	1 (L+R) / 0
Transmitter	Remote Control	Yes
	Built-in Speakers	Yes (2W x 2)
Features	Multi Display Function	PIP / PBP
	Filter Type	3D Comb filter / Deinterlace
	Multi Language	English, Spanish, French, German, Italian
	Auto Source Sequencing	Yes
	Motion Sensor	Microwave Motion Sensor (10 ~ 30 feet)
Dimension	Outline Dimension (W x H x D)	22.913" x 16.728" x 2.925"
Cabinet	Material / Color	Electronic galvanized Iron / Black
Warranty	Part/Labor	2year / 2year
Power	Consumption: < On	< 60W
	Electrical Ratings	AC100 ~ 240V(50/60Hz) DC 24V / 3A
Circumstance	Operating Temperature	0 ~ 50° C / 32 ~ 122° F
	Storage Temperature	-20 ~ 60° C / -4 ~ 140° F
Camera	Camera Type	WDR Camera
	Mechanical Design	Tilt Swivel Camera
	Signal / Scanning System	NTSC / PAL
	Image Sensor	1/3" Sony Double SCAN CCD
	Scanning System	2 : 1 Interface
	AGC Control	52dB
	Resolution	Horizontal: 560TV Lines
	Lens Mount	2.8~12mm Varifocal Lens (F=1.5)
	Sensitivity	0.4 Lux (50 IRE) with F1.2 Lens, 0.001 Lux (50 IRE) Sense-up x 256
	Electronic Shutter	1/60 ~ 1/90,000 Sec
Mounts	VESA™ Mount Size	100 x 100mm
	Wall	WB-5, WB-10, WB-30, WB-31
	Ceiling	CMK-01

*Design and specifications are subject to change without notice


DIMENSIONS

23PVMV

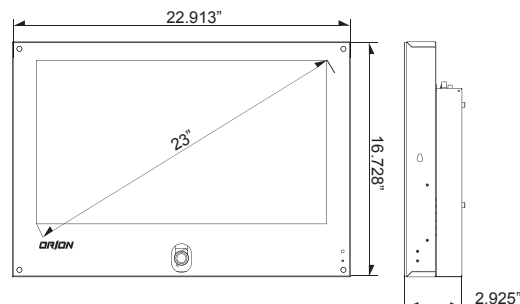

WHERE TO USE

PVMV can be used in Restaurant, Grocery Store, Casino, School, Financial Institute, Dealership, Department Store, Convenience Store, Mall, Transportation, Airport, Public Arena, High Technology Store and etc...

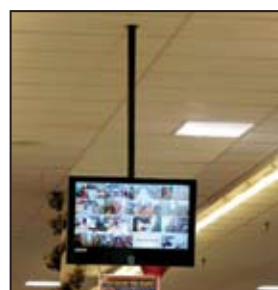

PVM installed ceiling mount



Rear Quarter View

