



Public View Display w/ **WDR Built in Camera**

SPECIAL FEATURES

- Built-In Media Card Reader - Perfect for Advertising and Promoting Business
- Built-In 2:1 Interface Transfer 1/3 Inch Double Scan CCD
- All Front Acrylic LCD Protective Shield
- 3D Comb Filter / Deinterlace
- PIP / PBP Multiple Display Function
- 540 TV Line Horizontal Resolution
- 0.1 Lux (Normal Mode) / 0.001 Lux (DSS Mode)
- Optional Mounts: Wall or Ceiling Mount Kits

SPECIFICATIONS

		26PVMP
Display	Screen Size	26 Inch
	Max. Resolution	1366 x 768 @ 60Hz
	Pixel Pitch	0.4215 x 0.4215mm
	Brightness	450cd/m ²
	Contrast Ratio	2000 : 1
	Aspect Ratio	16 : 9
	Viewing Angle	178° / 178°
	Display Color	16.7 Million
	Response Time	< 8ms (G to G)
	Video System	NTSC / PAL
Interface	Frequency (H)	30~64 KHz(H)
	Frequency (V)	56~75 KHz(V)
	Video In / Out (BNC Type)	2 / 3 (Include Camera Out)
	S-Video In / Out	1 / 1
	VGA In(15Pin D-Sub)	1
	Component In	1
	DVI In / HDMI In	1 / 1
	PC Stereo In	1
Transmitter	Audio In (RCA Type)	3
	Remote Control	Yes
Audio	Built-in Speakers	Yes (4W x 2)
	Filter Type	3D Comb Filter / Deinterlace
Features	LCD Protection	All Front Acrylic Shield
	Multi Language	English, Spanish, French, German, Italian
	Cycle Function	Yes
	Motion Detection	Microwave Motion Sensor (10 ~ 30 feet)
Dimension	Outline Dimension (W x H x D)	26.5" x 18.42" x 4.52"
	Net. Weight	18.5Kg (40.8lbs)
Cabinet	Material / Color	Powder Coat Metal / Black
	Part / Labor	1year / 1year
Warranty	MTBF (Approx.)	50,000 Hours
Regulations		RoHS, TUV-NRTL (=UL), CB, FCC (A), CE-Emc (LVD)
Power	Consumption: < On	< 135W
	Electrical Ratings	AC100 ~ 240V (50/60Hz) or DC 24V
Circumstance	Operating Temperature	10° ~ 40° C / 50° ~ 104° F
Camera	Camera Type	WDR Camera
	Signal / Scanning System	525Lines NTSC / 625Lines PAL
	Total / Effect Pixels	768(H) x 494(V) / 752(H) x 582(V)
	Image Sensor	2:1 Interface Transfer 1/3 Inch Double Scan CCD
	Resolution	Horizontal: 540TV Lines
	Lens Mount	4~9mm Varifocal Lens (F=1.5)
	Sensitivity	0.1Lux (Normal Mode) / 0.001 Lux (DSS Mode)
	Electronic Shutter	1/60 ~ 1/10,000 Sec. / 1/50 ~ 1/10,000 Sec.
Mounts	VESA" Mount Size	100 x 100mm (BS M4 x 10mm Screw)
	Wall	WB-05, WB-10, WB-30, WB-31
	Ceiling	CMK-01
Card Reader	Media Card Reader	Optional


*Design and specifications are subject to change without notice

		Card Reader
Support Storage Type	Compact Flash	8MB ~ 8GB
	Microdrive / ST1 Driver	1GB, 2GB, 4GB / 2.5GB, 5GB, 6GB, 8GB
	Xd-Picture	16MB~2GB: M-CARD, H-CARD
	Multimedia Card	8MB~4GB, MMC Plus, MMC mobile, MMC micro
	Secure Digital	8MB~2GB, miniSD, microSD (SDHC, 3GB~)
	Memory Stick / Duo	4MB ~ 128MB
	Memory Stick Pro / Duo	256MB, 512MB, 1GB, 2GB
Socket Type		CF Type II, 4 in 1 Multi socket, USB socket
Support Data Type	Movie	Divx3, Divx4, Divx5 (.avi) / Xvid (.avi) MPEG-1(.mpeg / .mpg) / MPEG-2(.mpeg / .mpg) / MPEG-4(.mpeg / .mpg V3 .avi) / A license for Divx / MPEG-4 decode is required / UP to 800 x 450(under 4Mbps)
	Music	MPEG-2, MPEG-1 layer 2, MP3, WMA, low complexity ACC, OGG(optional) 32KHz, 44.1KHz, 48KHz, 88.2KHz, 96KHz
	Photo	JPEG, JIFF, EXIF (.jpg) Baseline JPEG: below 5120 x 3840
Other functions		e-Book Play

*Design and Specs are subject to change without any notice

DIMENSIONS

26PVMP

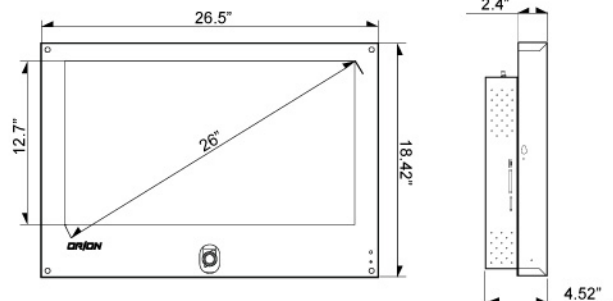

WHERE TO USE

PVMP can be used in Restaurant, Grocery Store, Casino, School, Financial Institute, Dealership, Department Store, Convenience Store, Mall, Transportation, Airport, Public Arena, High Technology Store and etc...