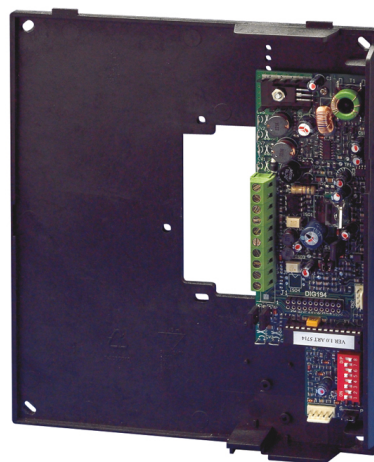


SIMPLEBUS INTERCOM BRACKET FOR BRAVO AND GENIUS B/W MONITOR

Bracket for digital Simplebus 2 system required to complete the Bravo handset version monitor when the intercom service is required. The video door entry monitor is complete with privacy of speech. The standard pushbuttons on the monitor takes on the functions of door open pushbutton, porter switchboard call or free pushbutton (C/N.O.) internal lighting pushbutton or video request. It manages the local floor call and call repetition as standard. Complete with DIP SWITCH with 8 positions for programming the user code. Addition of the pushbutton card art. 5733 allows availability of 4 supplementary pushbuttons. All the pushbuttons can be programmed by means of programmer art. 1251/A which allows the various functions to be set.

**General specifications**

Product height (mm):	197
Product width (mm):	169

Packaging

Single pack width (mm):	210
Single pack height (mm):	30
Single pack depth (mm):	170
Single pack weight (g):	0,3

Electrical specifications

Maximum current absorption (mA):	160
----------------------------------	-----

Technical properties

Temperature range:	-5 / 55 C
Audio/video system	

Control functions

Automatic gain control (AGC)

General functions

Self-ignition
Switchboard call function
Floor door call function
Actuator control function
Privacy conversation function
Intercom function
Privacy function

DATA SHEET

Call repeat function

Customisable ringtone



SURVEILLANCE
VIDEO .COM



800.955.5201

Email: sales@Surveillance-Video.com