



# INSTALLATION

1

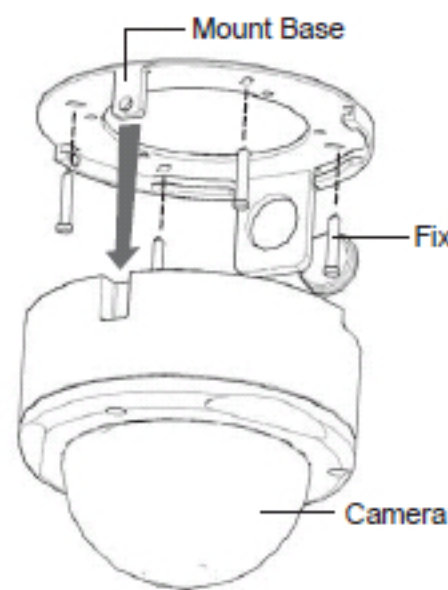


Fix the mount base onto the ceiling or wall by the fixing screw and insert the camera like the arrow direction.

2

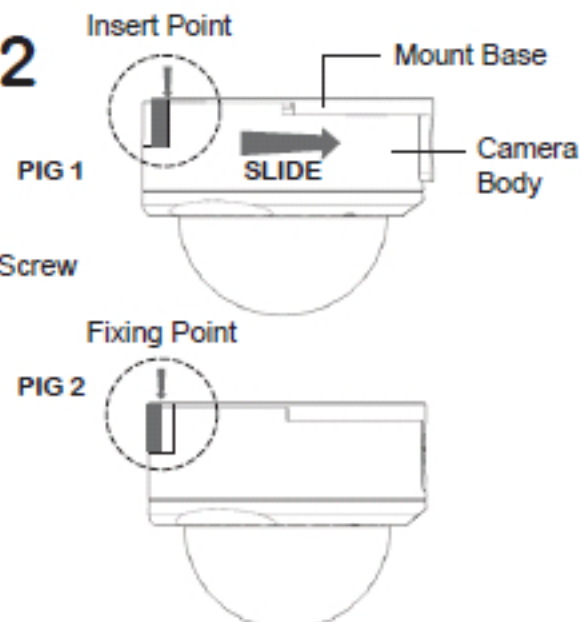


After insert the camera body to the mount base like the Fig1 and slide the camera body just like the Fig2 to fix the camera onto the base.

3

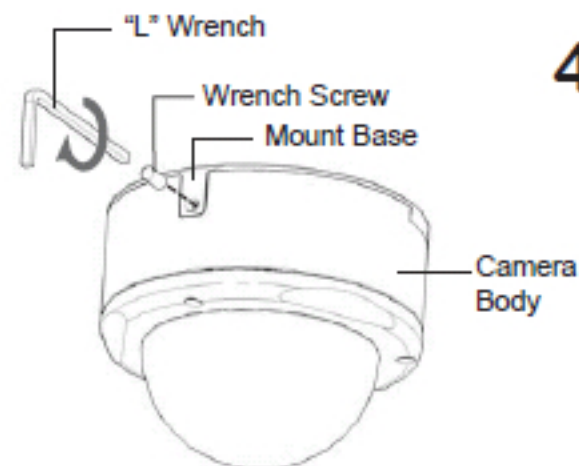


Fix the screw into screw hole in the mount-base by using the "L" wrench and tighten the camera body onto the base.

4

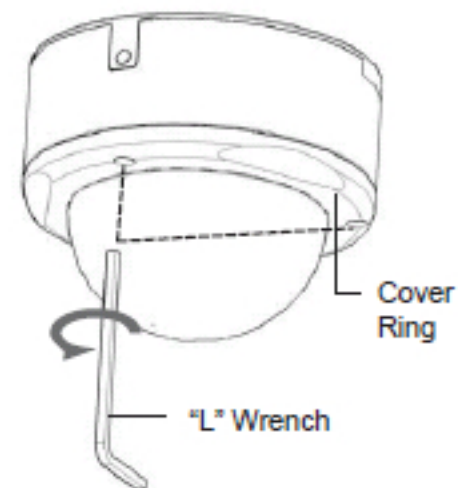


Unscrew the cover ring screw by using the "L" wrench and open the cover ring.

5

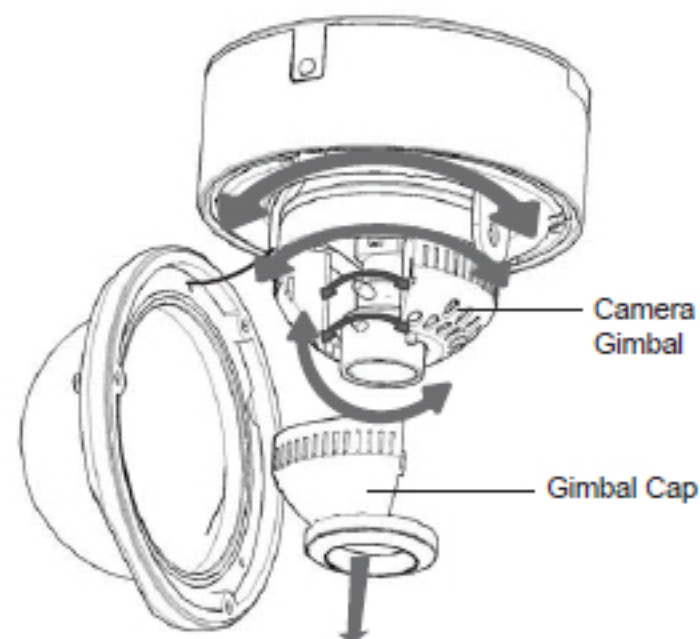


Open the bubble cap and move the camera gimbal to left, right and up, down to set the viewing direction. After set the viewing direction, open the gimbal cap like the arrow direction and adjust the viewing angle.

6

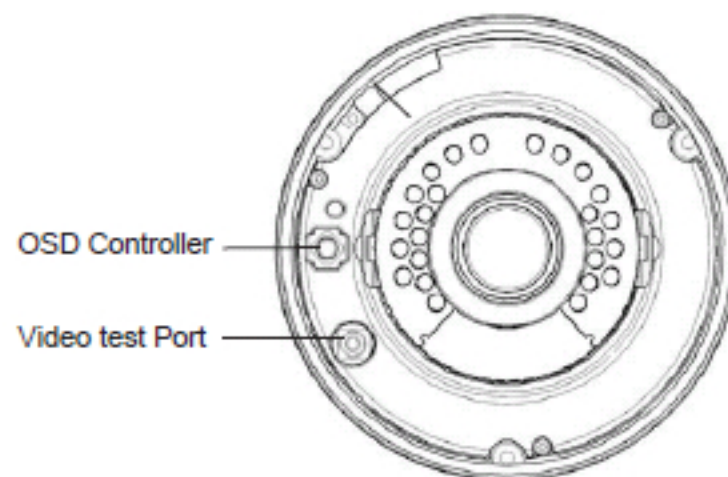

Set the desired OSD feature by using the OSD controller. (Refer the SOD manual to set up the desired OSD) in case of a installer has portable monitor, connect the video jack to the video test port to set up the OSD.

7

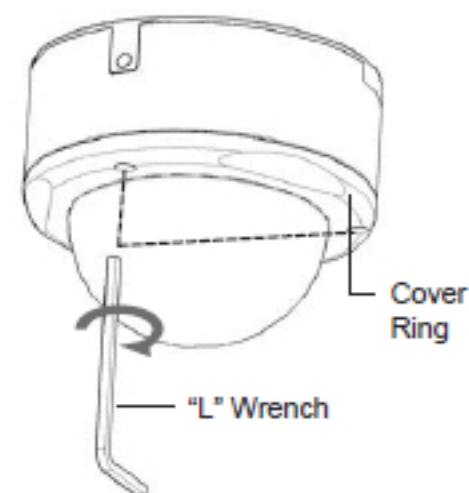

Tighten the screw by using the "L" wrench and complete the installation.