

DW^{ip} Snapit ONVIF PoE

DW^{ip} DIGITAL
WATCHDOG
Everything's Digital

MEGAPIX MD421D

IP 2.1MP Snapit Indoor Dome Camera



Full HD



Dual Streaming



Motion Detection



Triplex Encoder



ONVIF



PoE




UPnP



Easy Installation

Full High Definition delivers crystal clear 1080P HD resolution video images at 30 frames per second

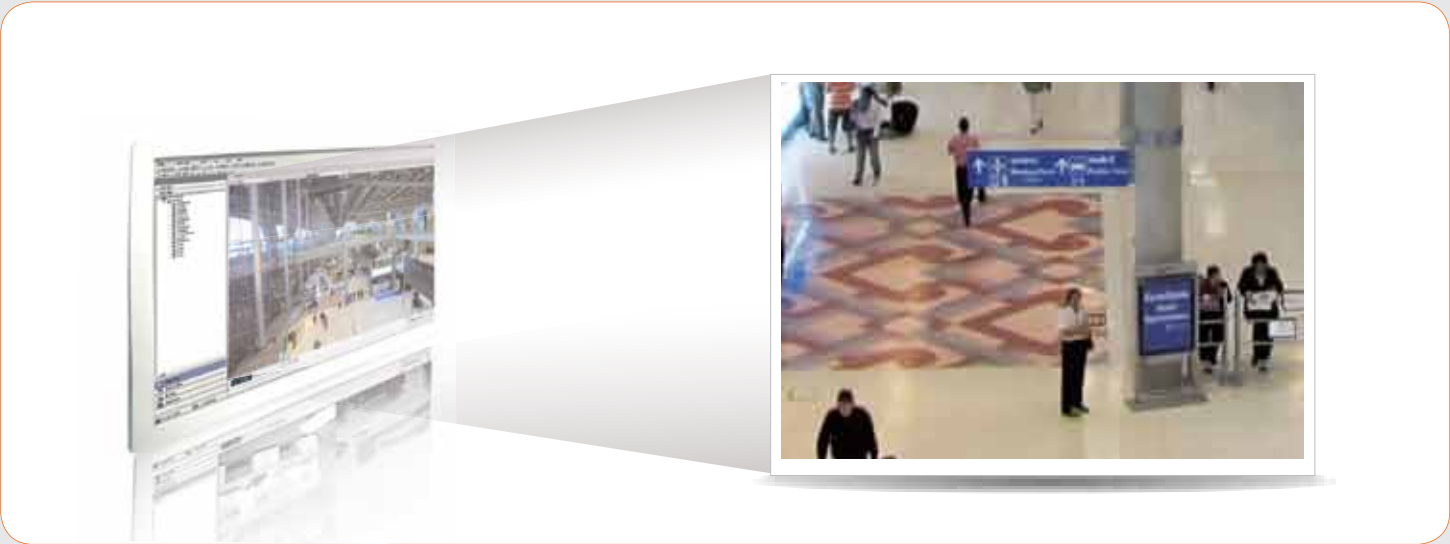

ONVIF (Open Network Video Interface Forum) compliant with ONVIF standards for increased flexibility and reduced total cost


PoE (Power over Ethernet) simplifies installation by connecting both power and network through a single cable



Wide View
covers a wide range of view (81°) and minimizes blind spots





Day & Night when light diminishes below a certain level, automatically switches to night mode to provide high quality black-and-white video images

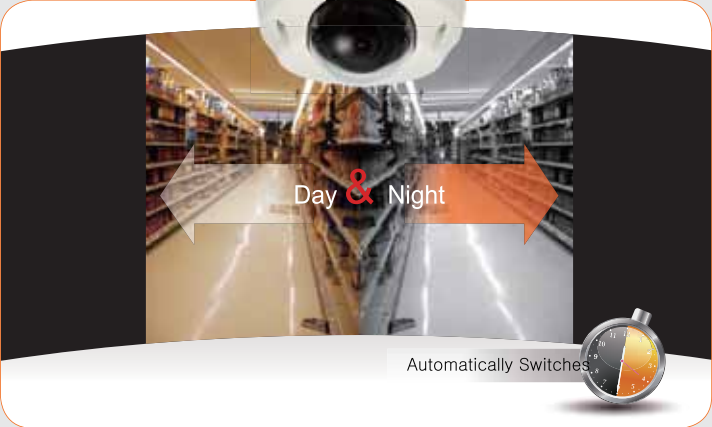





Dimensions (unit : mm)



Rotation 360



Panning 360



Tilting 90°


90°

Specifications


IMAGE	
Image Sensor	1/2.8" CMOS Sensor (7% Larger Than 1/3" CMOS Sensor)
Total Pixels	2016 (H) X 1108 (V)
Minimum Scene Illumination	F1.6 (30IRE): 0.5 Lux [Color] F1.6 (30IRE): 0.01 Lux [B&W]
LENS	
Focal Length	3.5-16mm
Lens Type	Auto Focus
Digital Zoom / Optical Zoom	8X / 4.5X
OPERATIONAL	
Brightness	0~19
Shutter Mode	Auto, Manual
Digital Slow Shutter	Off, 2X, 3X, 4X
Shutter Speed	1/30, 1/60, 1/120
Auto Gain Control	0~20
Back Light Compensation	Off, On
Day and Night	Auto, Day (Color), Night (B/W)
Lens Mode	Manual, DC, AF
Chroma (Hue & Saturation Settings)	0~20
Sharpness	0~10
Mirror & Flip	Off, On
3D-Digital Noise Reduction	Off, Low, Middle, High
Privacy Zone	Off, On (30 Programmable Zones)
Motion Detection: Sensitivity	Low, Middle, High
Alarm Notifications	Notifications Via E-mail
NETWORK	
LAN	802.3 Compliance 10/100 LAN
Video Compression Type	H.264, MPEG4, MJPEG (Super Fine-Low)
Resolution	1920X1080 (16:9) ~ 320X240 (4:3)
Frame Rate	Up to 30fps at All Resolutions
Streaming Capability	Dual-Stream at Different Rates and Resolutions
IP	IPv4, IPv6
Protocol	TCP/IP, HTTP, DHCP, PPPoE, ICMP, ARP, RARP, RTSP, NTP, UDP, Multicast
Maximum User Access	20 Users
ONVIF Conformance	Yes
Web Viewer	OS: Windows XP / Vista / 7, MAC OS Browser: Internet Explorer, Chrome, Firefox, Safari
Video Management Software	NxMS, Pivot
Memory Slot	Up to 24 Hour to Micro SDHC Card (4GB-32GB) Card Not Included*
ENVIRONMENTAL	
Operating Temperature/ Humidity	-10°C ~ 55°C (14°F ~ 131°F)
Operating Humidity	Less than 90% (Non-Condensing)
Storage Temperature	-20°C ~ 70°C (-4°F ~ 158°F)
Other Certifications	CE, FCC, RoHS
ELECTRICAL	
Power Requirement	DC 12V, PoE (IEEE802.3af Class 3)
Power Consumption	7.2W, 600mA
MECHANICAL	
Material	Plastic
Dimensions	108 X 96.8 mm (4.25 X 3.8 in)
Weight	0.507 lbs

*Specification is subject to change without prior notice.


Snapit Easy Installation 1 2 3



1 Two Screw Installation



2 Adjustment



3 Snap It

Summary

The MD421D MEGAPIX camera is a triple codec network camera that provides 1080P megapixel resolution at 30 frames per second. The camera's advanced technologies like Electronic Day and Night, 3D-DNR, and Double Shutter WDR will deliver the best images in any type of environment. And Power over Ethernet combined with our Snapit Housing, branded for its quick and easy installation procedure, allows you to view and control your MEGAPIX camera from anywhere in the world in just a few minutes.

Features

- ONVIF Compliant
- 2.1 Megapixels (1080P, 30fps)
- Triple Codecs (H.264, MJPEG, MPEG4) with Dual-Stream
- 1/2.8" CMOS Sensor(7% Larger Than 1/3" CMOS Sensor)
- 3.5~16mm Auto Focus Lens
- 8X Digital Zoom, 4.5X Optical Zoom
- Electronic Day and Night
- Power over Ethernet [PoE] & DC12V
- Two-Way Audio
- Local SDHC Card Remote Backup
- Web Server Built-in
- Double Shutter WDR (Wide Dynamic Range)
- 3D-DNR (3D Digital Noise Reduction)
- Programmable Privacy Zones (30) & Motion Detection

Accessories (Optional)



DWC-D1WM

Wall Mount for D1 & D4 Housing