



AH9040S

15" 2-way Stadium Horn System 90° x 40°



AH9040S

Features

- Efficiency rating of 102.5dB (1 W/1 M)
- 250 watts power handling
- Maximum output of 126.5dB (Rated Power @ 1 M)
- Constant directivity design offers controlled coverage of 90° H by 40°V (2kHz octave band)
- Excellent low frequency response provides bass you can feel
- Driver complement includes a 15" cast frame woofer with a concentrically mounted 1" exit compression driver coupled to a 90° H x 40°V HF horn
- Full range frequency response of 75Hz – 14.5kHz (±5dB)
- Easy, weather resistant connection via a 4-pole terminal block connector
- 8Ω nominal system impedance
- Heavy duty stainless steel mounting bracket (included) allows for easy installation to almost any flat surface
- Three forged eyebolts also included for suspended installation

Applications

Atlas Sound model AH9040S stadium horn is ideal for shorter throw and wide coverage where full range reproduction, maximum intelligibility, and high sound pressure levels are required. Applications include football stadiums, sports arenas, baseball fields, convention centers, and auditoriums.

Weather resistant construction features of the AH9040S include a multiple screen configuration to prevent moisture from damaging internal components: A perforated aluminum screen covers the large horn mouth, a secondary screen is in place forward of the high frequency driver, and a third tightly perforated screen protects the 15" cast frame woofer.

Installation

A heavy-duty stainless steel "C" style mounting bracket is included with the AH9040S to allow easy mounting to most any flat surface. Three drop forge eyebolts are also pre-installed (2-front of horn plus 1-rear for "pull-up") for suspension mounting via load rated aircraft cable. (Use caution when suspending any object overhead. Refer to the installation manual for more details).

The AH9040S includes a 4 pole terminal block, weather resistant connector on the underside of the device for easy hook-up and daisy chain wiring to other AH9040S. If 70.7/100V operation is required, the optional Atlas Sound AF140 autoformer may be used. NOTE: Due to the full range operation capabilities of the AH9040S 70.7/100V operation is possible, but discouraged. Better frequency response and amplifier dampening factor can be realized by using large gauge (#10 to #12) home runs and series/parallel hook-up wiring at the head end location with direct coupled, low impedance amplifiers. Generally speaking, this improvement of frequency response and amplifier dampening factor is worth the sacrifice of line loss over distance - especially if transformer insertion loss at the loudspeaker location is considered.



AH9040S

Technical Specifications

Power Handling:	250 watts (45V) RMS
Sensitivity (1W / 1M):	102.5dB SPL (75Hz – 14.5kHz ½ octave bands)
Frequency Response:	75Hz – 14.5kHz (±5dB)
Dispersion:	90° x 40°
Nominal Impedance:	8Ω
Minimum Impedance:	5.6Ω @ 9000Hz Nominal -6dB
Height:	24.91" (632.71mm)
Width:	29.57" (751.08mm)
Depth:	29.65" (753.11mm)
Shipping Weight:	100 lbs (45.4kg)
Driver Type:	1" HF & 15" LF

Architect & Engineer Specifications

Loudspeaker shall be Atlas Sound Model AH9040S or approved equal.

Loudspeaker shall be a 2-way design incorporating an environment-resistant housing.

Loudspeaker shall include a 15", horn loaded, cast frame woofer housed in a 2296 in³ (1.3 ft³) enclosure and an integral, concentrically mounted 1" exit compression driver coupled to a constant directivity high frequency horn. The three pole (18dB/octave) dividing network crossover frequency shall be 1.4kHz. The dividing network shall include a poly switch protection circuit for the high-frequency component.

The loudspeaker system shall be capable of providing a sound dispersion angle of 90° horizontal by 40° vertical in the 2kHz octave band.

Rated power shall be 250 watts based on EIA Standard RS-426B*.

Enclosure shall be UV-resistant, steel reinforced, low pressure injection molded fiberglass and shall include a 3 stage multiple mesh filter system for weather and rodent resistance:

- A. Large 20-gauge perforated aluminum screen on front mouth assembly.
- B. 100 x 100 weave stainless steel mesh between HF horn and HF driver.
- C. 100 x 100 weave stainless steel mesh over 15" woofer.

Sensitivity shall be 102.5dB SPL (75Hz to 17kHz ½ octave bands) measured at a distance of 1 meter on axis with a 1 watt input.

Overall frequency response shall be 75Hz – 14.5kHz (±5dB).




The loudspeaker shall include a stamped and formed, 12-gauge stainless steel mounting bracket assembly for surface mounting and three M8 drop forged eyebolts for suspension mounting.


The input section located on the bottom rear of the loudspeaker shall include a 4 pole terminal block connector.

Nominal impedance shall be 8Ω.


Dimensions shall be: Height 24.91" (632.71mm)
Width 29.57" (751.08mm)
Depth 29.65" (753.11mm)
Weight 100 lbs (45.4kg)

*EIA test spectrum is applied for eight hours.
(This procedure provides a rigorous test of both thermal and mechanical failure modes.)

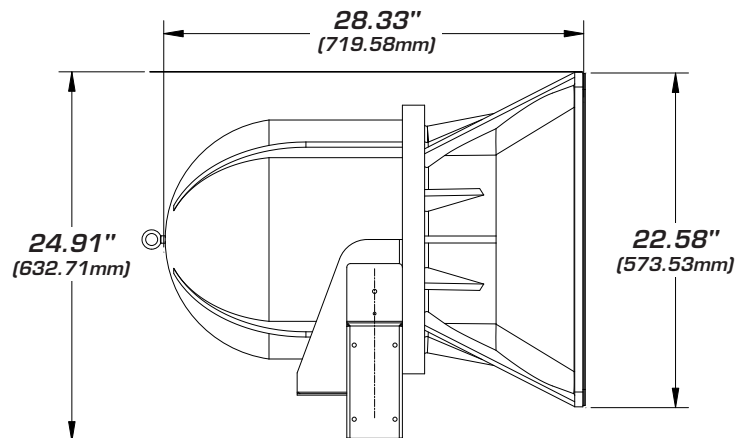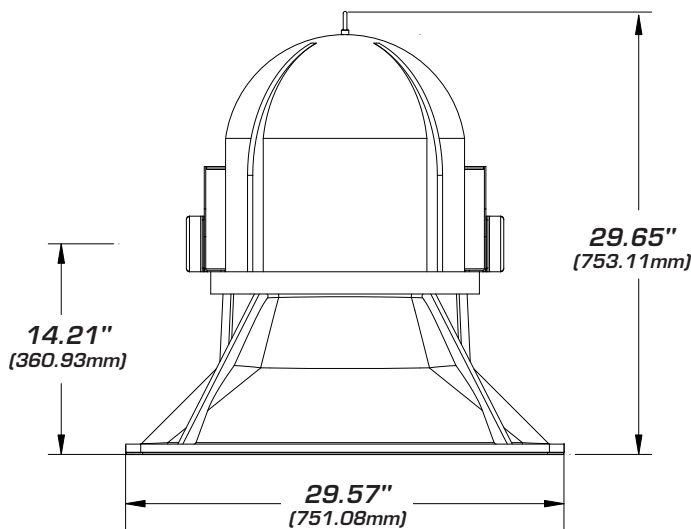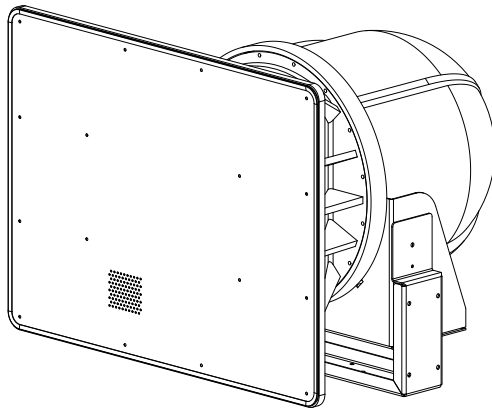


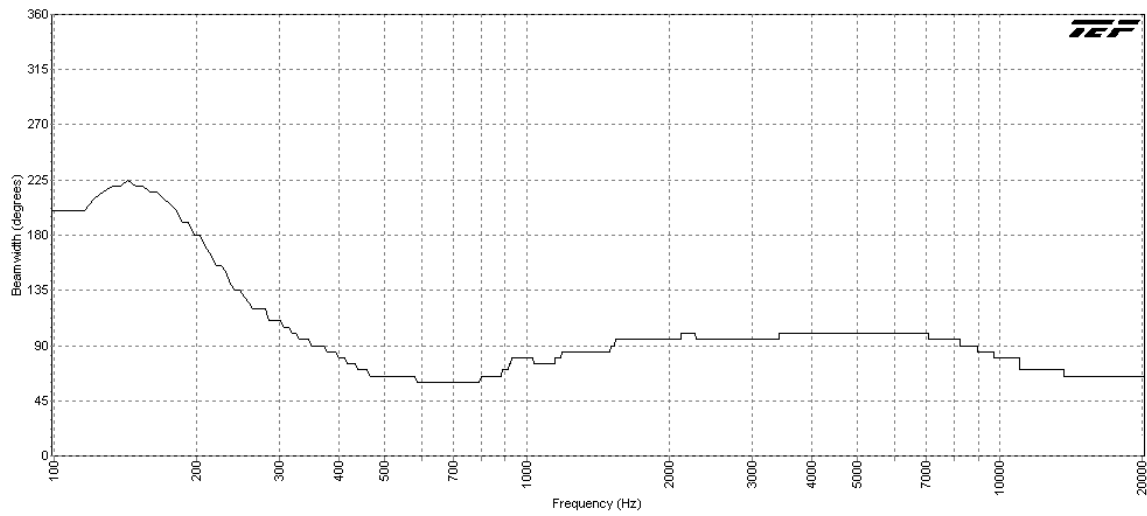


AH9040S Horizontal Beamwidth (-6dB)

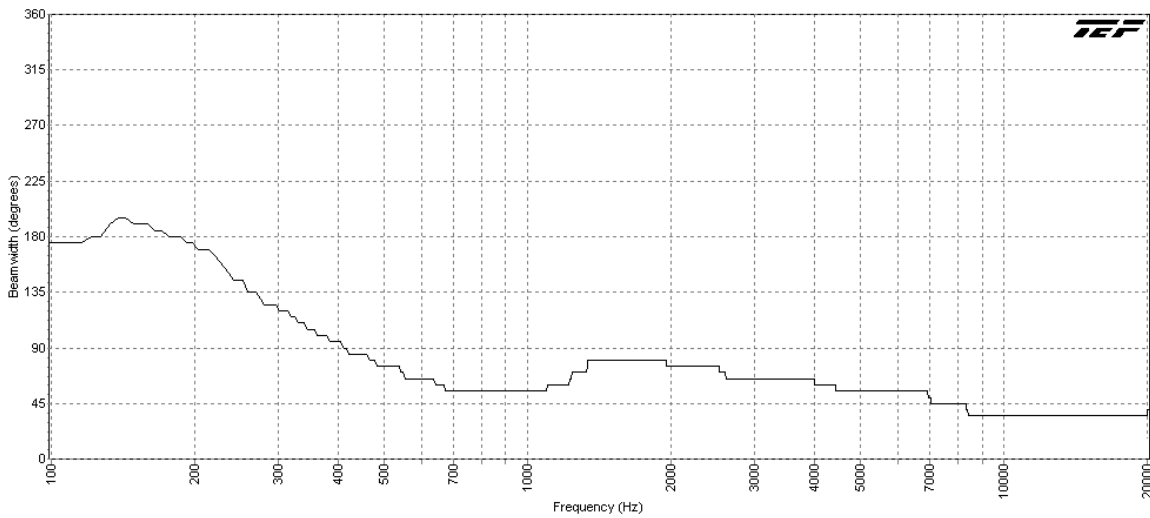


AH9040S Vertical Beamwidth (-6dB)

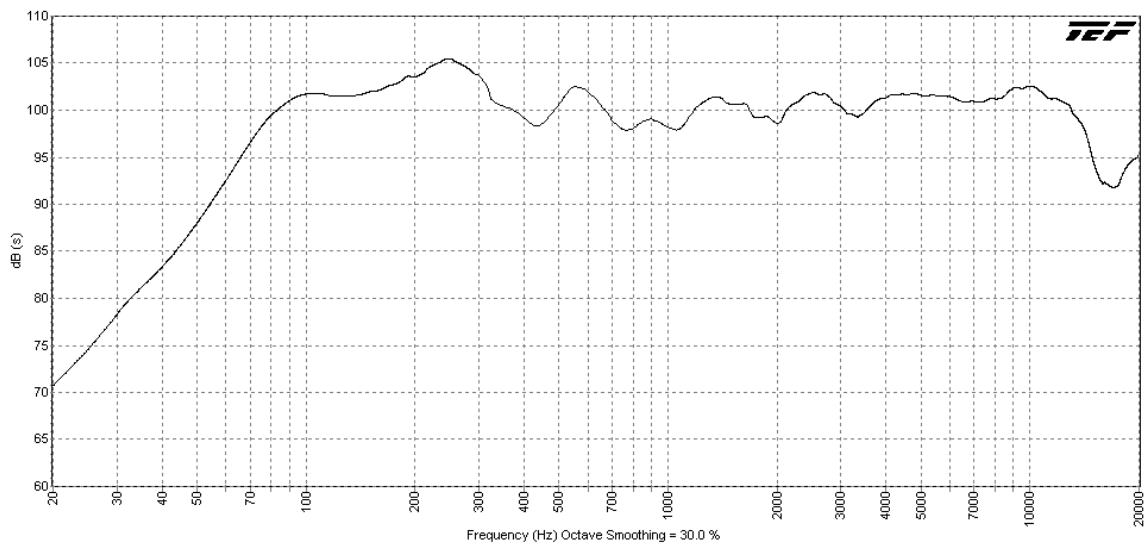


AH9040S Frequency Resonse

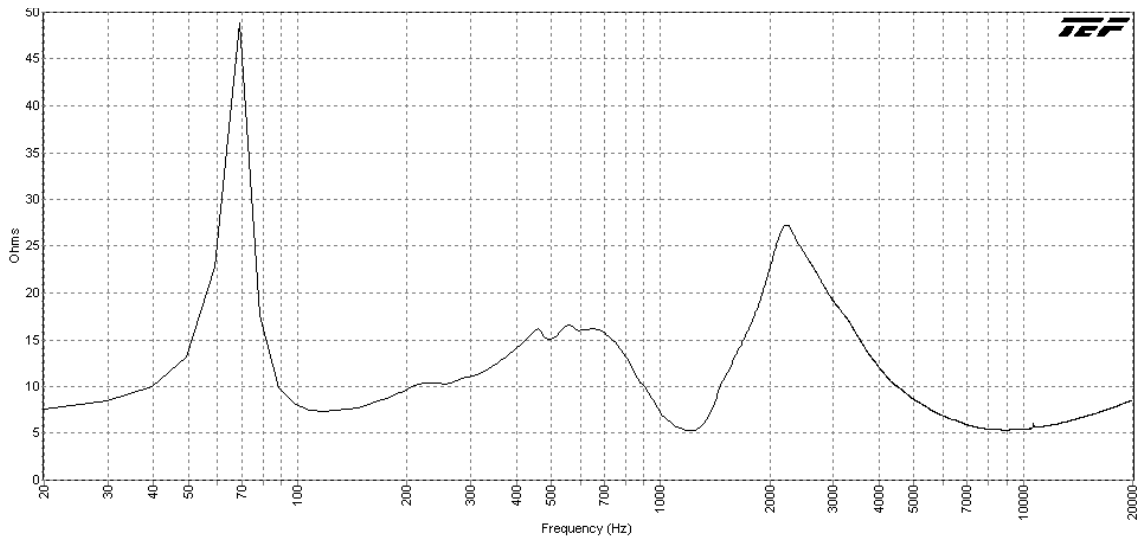

AH9040S Impedance (ohms) vs. Frequency

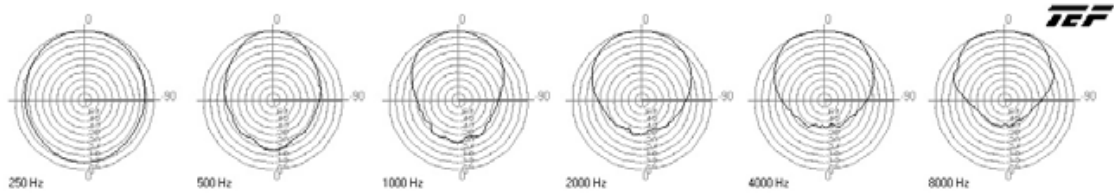

AH9040S Horizontal Polars (Normalized to Zero on Axis) (-6dB)

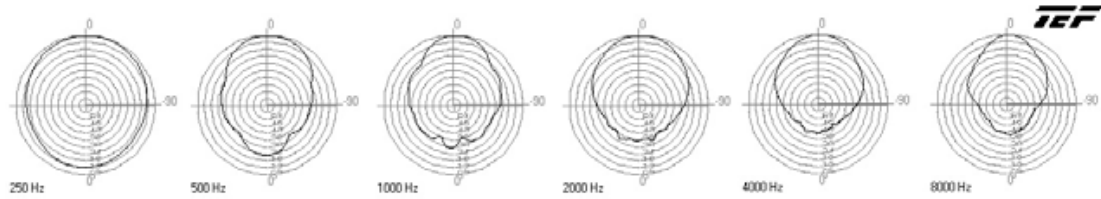

AH9040S Vertical Polars (Normalized to Zero on Axis) (-6dB)