



AXIS 216MFD/216MFD-V Network Cameras

Discreet video surveillance with exceptional image detail.



- > Discreet and compact design
- > Megapixel resolution
- > Simultaneous MPEG-4 and Motion JPEG
- > Power over Ethernet
- > Two-way audio

AXIS 216MFD Network Cameras offer high-performance, fixed dome solutions for exposed indoor locations. Compact, discreet and with megapixel resolution, they are ideal for indoor video surveillance of areas such as retail stores, schools, airports, banks and government buildings.

The vandal-resistant AXIS 216MFD-V, and AXIS 216MFD with its tamper-resistant casing, are fixed domes specifically adapted for discreet video surveillance in exposed indoor environments.

Thanks to the 1.3 megapixel progressive scan sensor and advanced image processing, AXIS 216MFD Network Cameras deliver crisp and clear images, perfect for the identification of objects and persons.

Simultaneous MPEG-4 and Motion JPEG video streams in full megapixel resolution allow for optimization of image quality and bandwidth efficiency.

Power over Ethernet (IEEE 802.3af) supplies power to the cameras via the network, which eliminates the need for power cables and reduces installation costs.

Two-way audio support allows remote users to listen in on an area and communicate with visitors or intruders.




Technical specifications – AXIS 216MFD/216MFD-V Network Cameras

Camera		Network	
Models	AXIS 216MFD: Tamper-resistant casing AXIS 216MFD-V: Vandal-resistant casing	Security	Password protection, IP address filtering, HTTPS encryption, IEEE 802.1X network access control, user access log
Image sensor	1/3" Progressive scan RGB CMOS 1.3 Megapixel	Supported protocols	IPv4/v6, HTTP, HTTPS, QoS layer 3 DiffServ, FTP, SMTP, Bonjour, UPnP, SNMPv1/v2c/v3(MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, RTCP, ICMP, DHCP, ARP, SOCKS
Lens	Varifocal 2.8 –10 mm, F1.3, DC-iris Angle of view: 27°–100° horizontal	System integration	
Minimum illumination	2 lux, F1.3	Application Programming Interface	Open API for software integration, including VAPIX® from Axis Communications available at www.axis.com
Shutter time	1/15000 s to 1/4 s	Intelligent video	Video motion detection, active tampering alarm, audio detection
Camera angle adjustment	Pan 360°, tilt 170°, rotation 340°	Alarm triggers	Intelligent video and external input
Video		Alarm events	File upload via FTP, HTTP and email Notification via email, HTTP and TCP External output activation
Video compression	MPEG-4 Part 2 (ISO/IEC 14496-2) Motion JPEG	Video buffer	20 MB pre- and post alarm
Resolutions	160x90–1280x1024	General	
Frame rate MPEG-4	Up to 8 fps at 1280x1024, 13 fps at 1024x768, 20 fps at 800x600	Casing	AXIS 216MFD: Tamper-resistant casing AXIS 216MFD-V: 1000 kg (2200 lb.) impact-resistant casing
Frame rate Motion JPEG	Up to 12 fps at 1280x1024, 20 fps at 1024x768, 30 fps at 800x600	Processors and memory	ARTPEC-A, 64 MB RAM, 8 MB Flash
Video streaming	Simultaneous Motion JPEG and MPEG-4 Controllable frame rate and bandwidth VBR/CBR MPEG-4	Power	4.9–5.1 V DC max 3.8 W Power over Ethernet IEEE 802.3af Class 1
Image settings	Compression, color, brightness, sharpness, white balance, exposure control, rotation, fine tuning of behavior at low light Text and image overlay Privacy mask	Connectors	RJ-45 10BASE-T/100BASE-TX PoE, DC jack Terminal block for 1 alarm input and 1 output, 3.5 mm mic/line in, 3.5 mm line out
Audio		Operating conditions	0–50 °C (32–122 °F) Humidity 20–80% RH (non-condensing)
Audio streaming	Two-way, half duplex	Storage conditions	–20–70 °C (–4–158 °F)
Audio compression	AAC LC 8 kHz G.711 PCM 8 kHz G.726 ADPCM 8 kHz Configurable bit rate	Approvals	EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 55024, FCC Part 15 Subpart B Class B, ICES-003 Class B, VCCI Class B, C-tick AS/NZS CISPR 22, EN 60950-1 Power supply: EN 60950-1, UL, CSA
Audio input/output	Built-in microphone, external microphone input or line input, line level output	Weight	AXIS 216MFD: 425 g (0.94 lb.) AXIS 216MFD-V: 580 g (1.28 lb.)
		Included accessories	Power supply, mounting and connector kits, Installation Guide, CD with installation tools, recording software and User's Manual, Windows decoder 1-user license

More information is available at www.axis.com

Dimensions

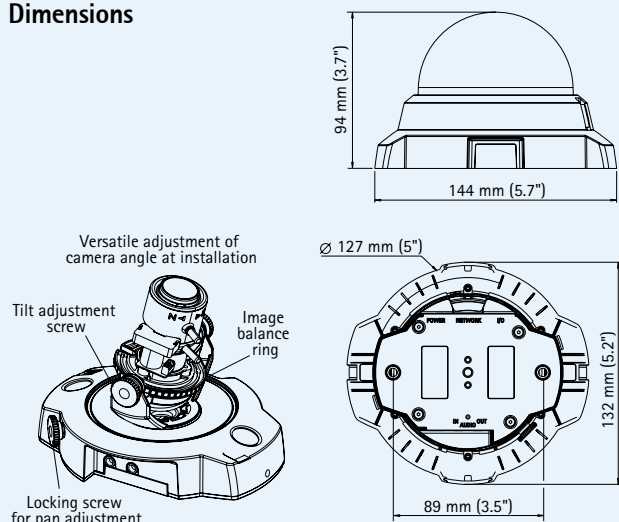

Optional accessories

Drop-ceiling mount kit, transparent or smoked cover



Optional casings with smoked cover or black casing



Various mounting kits



For information on AXIS Camera Station and video management software from Axis' Application Development Partners, see www.axis.com/products/video/software/