




Features

- 1/3 inch High Sensitivity CCD
- Ultra High Resolution : 600 TV Lines
- TDN(ICR), DSS, 3D-XDNR
- Min. Illumination : 0.000025 Lux (ICR On, B/W)
- OSD, Auto White Balance
- AGC, SBLC, Flickerless
- D-Effect
- Motion Detection, Privacy Zone, Mirror Function
- RS-485(Pelco-D, CNB) Interface
- 24VAC or 12VDC Dual Voltage

MONALISA II

DIMENSIONS

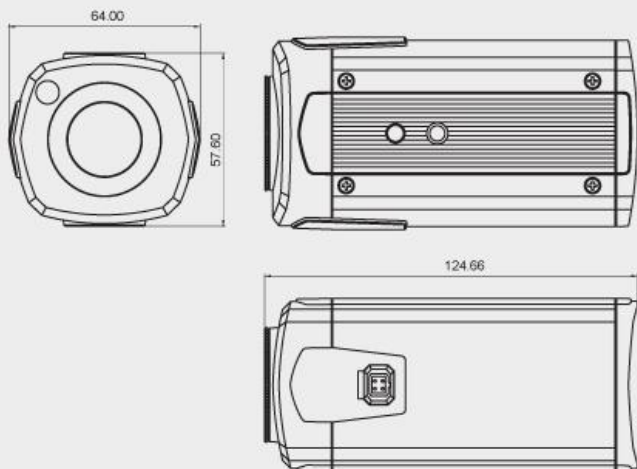

SPECIFICATIONS

Model	BBN-24F
Signal System	NTSC
Scanning System	2:1 Interlace
Sync. System	Internal
Scanning Frequency (H)	15.734 kHz
Scanning Frequency (V)	59.94 kHz
Image Sensor	1/3 Inch High Sensitivity CCD
Effective Pixels	768(H) x 494(V) 380K
Horizontal Resolution	600 TV Lines (BW 650TVL)
Lens Mount	CS Mount
Video Output Level	1.0V p-p (75Ω, Composite)
S/N Ratio	More than 50dB (AGC Off)
Digital Slow Shutter	Off / 2x~256x FLD
Day & Night Type	Electronic Sensitivity-up (DSS), ICR(AGC type)
Min. Illumination	0.05 Lux (Color), 0.005 Lux (B/W), 0.000025 Lux (B/W, ICR On)
3D-XDNR	OFF, On(0~20), Color Suppression
D-Zoom	Level (0~80), Limit
White Balance	AUTO / Manual / Push
AGC	On (0~20) / Off
SBLC	Off / Low / Middle / High
OSD	English
D-Effect	Mirror (H/V/Rotate) / Freeze / Positive / Negative
Privacy Zone	On/Off (4 Programmable Zone)
Motion Detection	On/Off (4 Programmable Zone)
Shutter Speed	1/60~1/120,000 Sec.
Operating Temp.	-10°C to +50°C / (Humidity) 30% to 80% RH
Supplied Voltage	24VAC (+20%~10%) or 12VDC (+20%~10%)
Power Consumption	Max. 3.6W / 300mA
Dimensions (WxHxD)	64(W) x 57.6(H) x 124.66(D) mm
Weight	Approx. 335g