


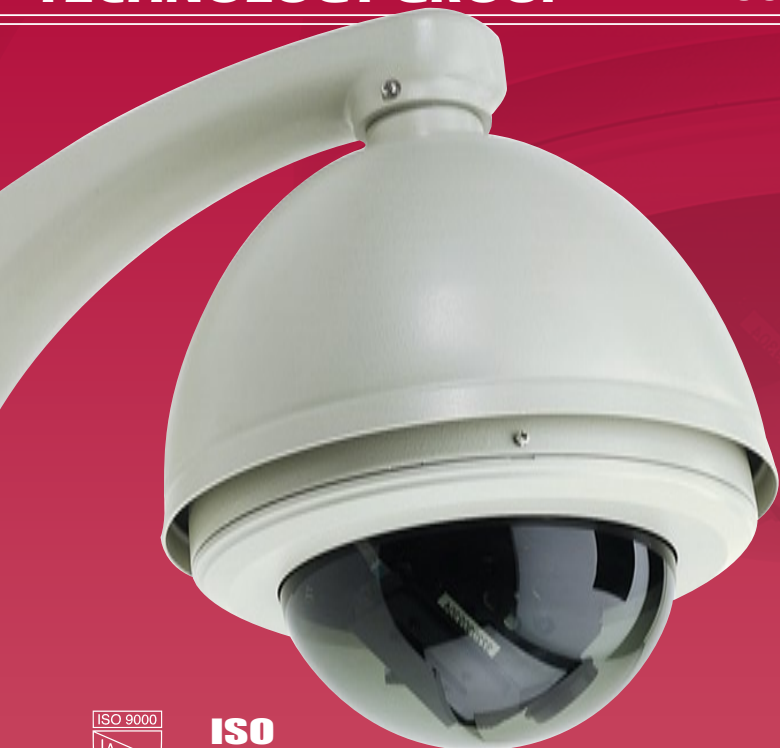

ISO
Certified

Features

- Sony EX-View HAD CCD High Resolution Sensor
- 35x Optical Zoom Lens and 16x Digital Zoom (Total 560x Zoom)
- Day & Night (IR Cut Filter Change Mechanism)
- 520 TVL Resolution
- 0.1 Lux (Day & Night), 0.5 Lux (Color) / F1.6
- On Screen Display (OSD) set-up menu
- Camera Title Overlay, 20 User-Definable Characters
- On-Screen Compass and Tilt Display
- Built in Multi-protocol: Pelco-D, Pelco-P, Kalatel, AD etc.

Bracket Options

- Corner Mount
- Wall Mount
- Pole Mount
- Pendant Mount
- Parapet Mount



Specifications

Camera Data

Sync System	Internal /External (Line Lock)
Image Sensor	Sony Ex-View HAD CCD
Resolution	520 TVL
Sensitivity	0.1 Lux (Mono) 0.5 Lux (Color)
Iris	Auto/Manual
Focus	Auto/Manual
Zoom	560x (35x Optical, 16x Digi.)
Video Output	1.0 Vp-p/75ohm
S/N	More than 48dB
White Balance	Auto/Manual
BLC	Off / Auto

Optical Lens

White Balance	Auto/Manual
Aperture (F)	F1.6 ~ F4.2
Focal Length	F=36~126mm

Mechanical

Pan/Tilt Speed	0.5° ~ 160°/s
Preset Speed	> 300° /s
Rotation	Pan 360°, Tilt 0°~90°
Auto Flip	Rotates 180° at the bottom
Zoom Speed	5s/8s (Wide/Tele)

Operation

Preset	80 with Titles
Auto Pan	355° Programmable
Display Area	8 with Titles
Preset Tour	4
Pattern	4

Environmental

Temperature	-40°C ~ 70°C
Humidity	0-95%
Protection Grade	IP66 Outdoor Housing

Electrical

Power Supply	24VAC 2.5A
Power Consumption	50W

General

Receiver	Built-in
Video Output	Female BNC/UTP
Communication Data	RS485/422, Coaxial
	Bi-phase, Manchester Code
Baud Rate	2400/4800 9600/19200bps
ID Range	1 ~ 254
Weight	2.5kg

Specification subject to change without notice.

IP66

