

EZ Quick-Connect



Position the BL3725 with the UTP connector side facing you.



Remove 1/4" of wire insulation from the UTP wire.



Hold wires 1/2" from the end and insert firmly into the two openings. Push wires straight into openings about 1/4".



To minimize noise insure that the wire pair remains twisted as close as possible to the connector.

Presenting the Unsurpassed EZ-VU Slimline Video Balun



Model BL3725 Features

- Connects to Unshielded Twisted Pair Wire in Seconds
- Wire Connections can be Made After the BL3725 is Attached to CCTV Devices Such as DVR's and Multiplexers
- Extremely Compact Size Allows the EZ-VU BL3725 to Fit Where Other Baluns Will Not
- Transmits Video 2000 Feet or More*
- UL Listed for the U.S. and Canada
- Cabling Cost Savings up to 50%

The EZ-VU BL3725 allows the replacement of coaxial cable with ordinary unshielded twisted pair (UTP) cable. This allows CCTV equipment to be installed using less expensive UTP cable.

The EZ-VU BL3725 can be connected to unshielded twisted pair (UTP) wire in seconds. Since the UTP wire connection is made at the back of the unit, this allows the connection to be made after the BL3725 is attached to the CCTV equipment. This is ideal for installations involving devices such as DVR's and multiplexers where confined spaces can slow down installations.

The EZ-VU BL3725 is suitable for any application in which baseband video is transmitted in NTSC, PAL or Secam formats such as CCTV cameras, monitors, multiplexers, switchers and DVR's.



Applications exist in the following areas:

- Commercial and Industrial Security
- Government, Military and Law Enforcement Applications
- Intelligent Transportation Systems (ITS)
- Casino Security and Surveillance Systems
- Airport Security Systems

* Distance will vary depending on cable quality

For more information, please contact:

info@digitalwatchguard.com
Tel: 516-868-3600

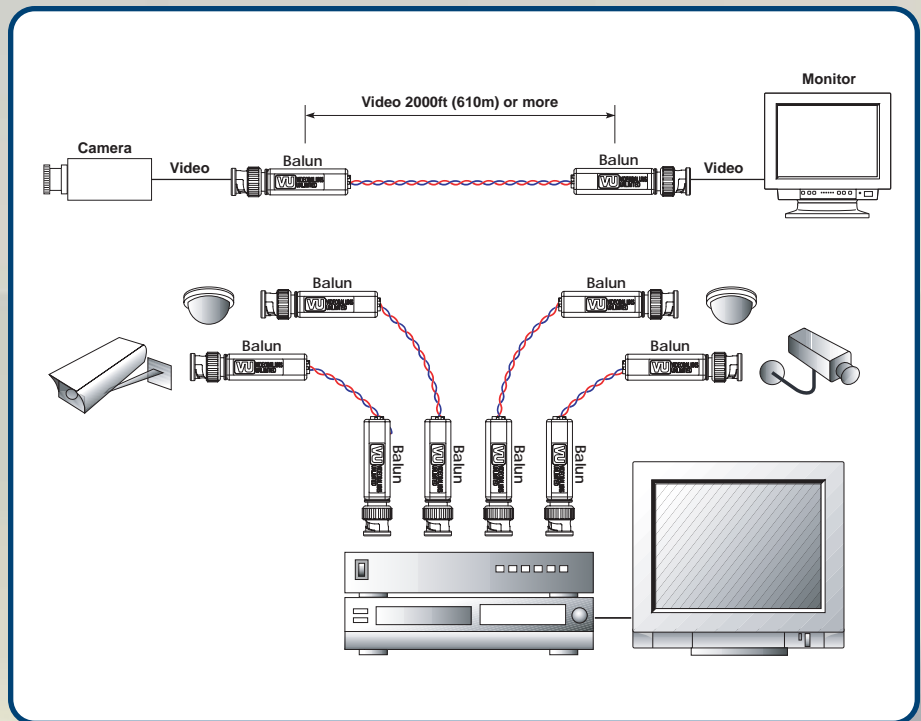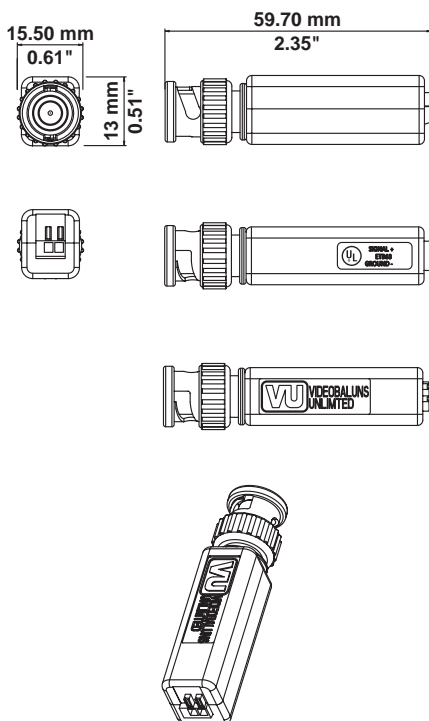

Specifications

Video	Bandwidth Format	DC to 6 MHz NTSC, PAL, SECAM
Distance	Using Cat 5 cable	2000 feet or more*
Wire	Unshielded Twisted Pair Gauge	Cat 2,3 5 or better 22 to 28 solid wire
Impedance	BNC Connector Side UTP Connector Side	75 ohms (unbalanced) 100 ohms (balanced)
Environment	Temperature Humidity (non condensing)	-20 to +75 C 0 to 95%
Mechanical	Size (LxWxH in inches) Mounting	2 11/32 x 5/8 x 1/2 Float
Warranty	Limited Lifetime	
Regulatory	UL/CUL Listed Flammability	94V-0

* Distance will vary depending on cable quality

All information provided in this document is the exclusive property of Videobaluns Unlimited and any reproduction of this document or unauthorized use is strictly prohibited without the expressed permission of Videobaluns Unlimited, LLC.

Manufactured exclusively for Videobaluns Unlimited, LLC

Tel: (516) 868-3600
Fax: (516) 868-3601
Email: sales@digitalwatchguard.com