

C600VFSCS


2.8-12mm auto iris varifocal lens

Features

- Day & Night - Select Color, BW or Auto
- Camera Titles - Up to 15 characters
- Mirror Image - Horizontal
- Privacy Screens - Up to 8 zones
- Perfect for use in tight spaces like ATMs.
- 5 year warranty



OSD Control of
All Major Camera
Functions

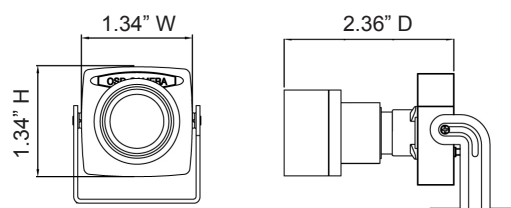

Specifications

Image Sensor	1/3" Sony Super-HAD II™ CCD
Resolution	600 TV lines
Minimum Illumination	0.01 lux
Total Pixels	811 (H) x 508 (V)
Effective Pixels	768 (H) x 494 (V)
Electronic Shutter Speed	Auto (1/50 sec., 1/60 sec. - 1/100,000 sec.)
S/N Ratio	52dB (AGC off, weight on)
Scanning System	2:1 interlace
Synchronization	Internal
Backlight Compensation	BLC / HLC / Off
White Balance	ATW1 / AWC - Set / Manual / Indoor / Outdoor
Gain Control	High / Middle / Low / Off
OSD	Available
2 DNR	On / Off
D-WDR	On / Off (0 - 63' level adjustable)
Motion Detection	On / Off (4 zone)
Privacy Function	On / Off (8 zone)
Mirror	On / Off
Park Line (for parking assistance)	On / Off
Sharpness	0 - 31' (level adjustable)
Day & Night	Color / BW / Auto / EXT
Blemish Compensation	Auto: 64 point

Power Consumption	120mA (max.) ± 10%
Power Supply	12VDC (power supply not included)
Operating Temperature/ Humidity	14° F - 122° F / RH 95% max.
Storage Temperature/ Humidity	-4° F - 140° F / RH 95% max.
Dimensions	1.34" (W) x 1.34" (H) x 2.36" (D)
Weight	1.76 oz.

Optional Accessory



PSW5
Power Supply

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 2/2/12

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com