

Bullet Camera

Day/Night, 380 or 550 TV Lines, 30 IR LEDs, Weatherproof Bullet Camera

CB-D2N-L • CB-HD2N-L • CB-HD6N-L

NTSC



KEY FEATURES

- 1/3" CCD Sensor
- 380 TV Lines or 550 TV Lines
- 2.9mm or 6mm Fixed Lens
- Day/Night Functionality
- 30 IR LEDs
- 0.1 Lux (Color), 0.01 Lux (B/W)
- 12VDC

CONSTRUCTION

- 3-Axis Aluminum Bracket
- Weatherproof Aluminum Housing

AVAILABLE MODELS

- CB-D2N-L - 2.9mm Fixed, Day/Night, 30 IR LEDs
- CB-HD2N-L - 2.9mm Fixed, Day/Night, 30 IR LEDs
- CB-HD6N-L - 6mm Fixed, Day/Night, 30 IR LEDs


TECHNICAL SPECIFICATIONS

Technical Specifications	CB-D2N-L	CB-HD2N-L	CB-HD6N-L
Video Format	NTSC		
Image Sensor	1/3" CCD		
Horizontal Resolution	380 TV Lines	550 TV Lines	550 TV Lines
Day/Night Functionality	Yes		
Lens Type (DC Auto Iris)	Fixed 2.9mm	Fixed 2.9mm	Fixed 6mm
Angle of View	120°	120°	58°
IR LEDs	30	30	30
IR LEDs Distance	Up to 65ft.	Up to 65ft.	Up to 65ft.
LEDs Illumination Angle	80°	80°	60°
Sync System	Internal		
Effective Pixels (HxV)	510(H) x 494(V)	768(H) x 494(V)	768(H) x 494(V)
Scanning System	525 Lines, 2:1 Interlaced		
Electronic Shutter	1/60 ~ 1/100,000 sec.		
Main Video Output	1.0 Vp-p Composite, 75 ohm		
Minimum Illumination	0.1 Lux (Color), 0.01 Lux (B/W)		
S/N Ratio	More than 48dB (AGC Off)		
White Balance	ATW		
General Information	CB-D2N-L	CB-HD2N-L	CB-HD6N-L
Operating Temperature	23°F ~ 113°F (-5°C ~ +45°C)		
Operating Humidity	Within 90% RH		
Power Consumption	12W (LEDs On), 4W (Camera Only)		
Input Voltage	12VDC		

*Specifications are subject to change without any prior notice.

PART NAMES AND LOCATIONS

- 1 Bolt
- 2 Sun Shield
- 3 Front Case
- 4 Rear Case
- 5 Bracket
- 6 Screws
- 7 L-Wrench
- 8 Video/Power Cable

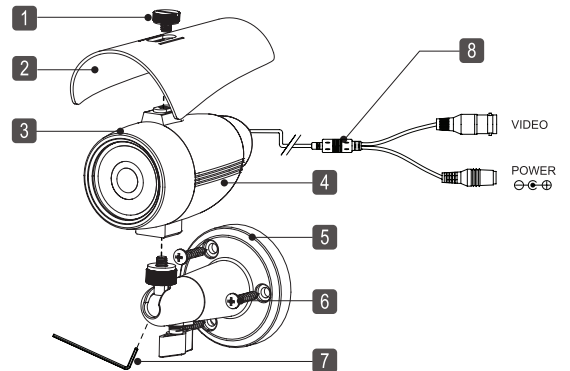

DIMENSIONS

Unit: Inches (mm)

