

CB-D3N/P-L



Key Features


- 1/3" CCD Sensor
- 380 TV Lines
- 3.6mm Fixed Lens
- Day/Night Function
- 0.1 Lux(Color), 0.01 Lux(B/W)
- 12 IR LEDs
- 12VDC

Technical Specifications NTSC = (N), PAL = (P)

Item	CB-D3N/P-L
Video Signal	NTSC / PAL
Image Sensor	1/3" CCD
Effective Pixel (NTSC/PAL)	512(H) x 496(V)/500(H) x 582(V)
Sync System	Internal
Min. Illumination	0.1 Lux(Color), 0.01 Lux(B/W)
Lens	3.6mm Fixed
Angle of View	92.7°
Horizontal Resolution	380 TV Lines
S/N Ratio	More than 48dB
ESC	Internal
Electronic Shutter	1/60 ~ 1/120,000 sec.(N), 1/50 ~ 1/120,000 sec.(P)
Video Output	1.0 Vp-p Composite, 75 ohm
IR LEDs	12
LED Illumination Angle	60°
IR Distance	Up to 25 ft.
Gamma Correction	0.45
Gain Control	AGC
Operating Temperature	-10°C ~ +50°C
Weatherproof	IP66
Operational Humidity	Within 90% RH
Power Consumption	1 Amp
Input Voltage	12VDC

* Must use specified and regulated 12VDC power supply.

Dimensions (UNIT: mm)

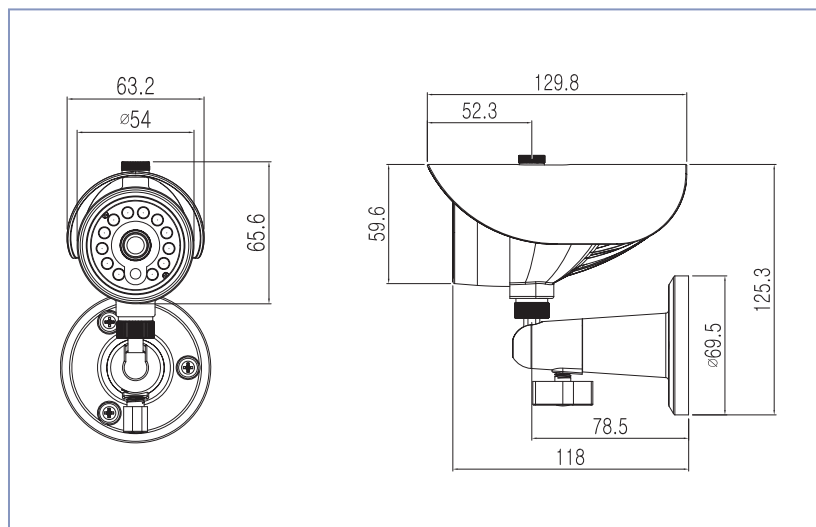

NEW! Available Sept. 2008

EASYVIEW