

Bullet Camera

Day/Night, 550 TV Lines, 18 IR LEDs, Weatherproof Bullet Camera

CB-HD39N-L

NTSC



KEY FEATURES

- 1/3" CCD Sensor
- 550 TV Lines (Color), 600 TV Lines (B/W)
- 3.8~9.5mm, DC Auto Iris Lens
- Day/Night Functionality with ICR
- 0.1 Lux (Color), 0.00 Lux (B/W, IR LEDs On)
- 18 IR LEDs
- Adjustable IR LEDs Intensity
- Dip Switch Menu
- Service Monitor Output
- 12VDC/24VAC Dual Voltage

CONSTRUCTION


- 3-Axis Aluminum Bracket (Wire feed-through)
- Weatherproof Aluminum Housing

TECHNICAL SPECIFICATIONS

Technical Specifications	CB-HD39N-L
Video Format	NTSC/PAL
Image Sensor	1/3" CCD
Horizontal Resolution	550 TV Lines (Color), 600 TV Lines (B/W)
Day/Night Functionality	Yes w/ ICR
Lens Type (DC Auto Iris)	Vari-focal 3.8mm-9.5mm
Angle of View	95.5°(W) ~ 37.3°(T)
IR LEDs	18
IR LEDs Distance	Up to 50ft.
LEDs Illumination Angle	60°
Sync System	Internal
Effective Pixels (HxV)	768(H) x 494(V)
Scanning System	525 Lines. 2:1 Interlaced
Electronic Shutter	1/60 sec.
Main Video Output	1.0 Vp-p Composite, 75 ohm
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
Minimum Illumination	0.1 Lux (Color), 0.00 Lux (B/W, IR LED On)
S/N Ratio	More than 48dB (AGC Off)
Camera Control & Setup	Dip Switch Menu
General Information	CB-HD39N-L
Operating Temperature	23°F ~ 113°F
Operating Humidity	Within 90% RH
Power Consumption	1 Amp (LED On), 500 mA (Camera Only)
Input Voltage	12VDC/24VAC Dual Voltage

*specifications are subject to change without any prior notice.

PART NAMES AND LOCATIONS

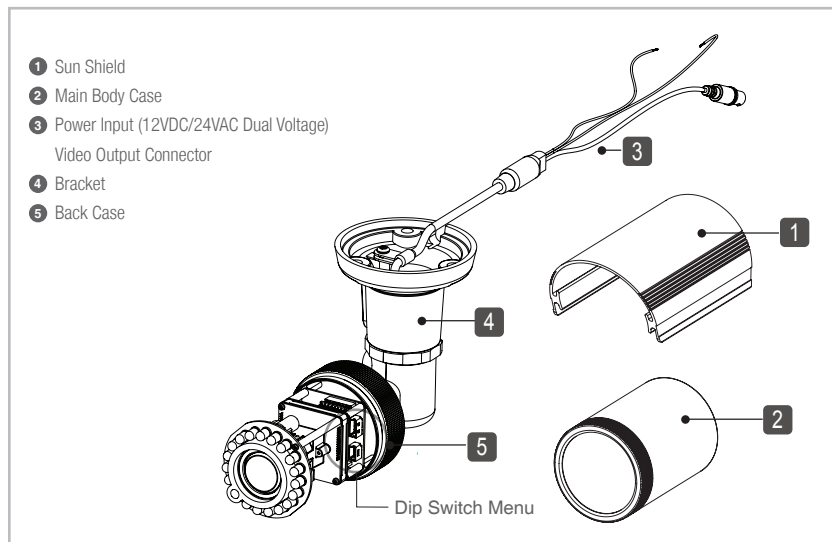

DIMENSIONS

Unit: Inches (mm)

