

CB-SD21N/P-L



Key Features

- 1/3" CCD Sensor
- 550 TV Lines
- Day/Night function with ICR
- 2.8~10mm, DC Auto Iris
- 0.1 Lux(Color), 0.01 Lux(B/W), 0.002 Lux(DSS On)
- 36 IR LEDs
- Separate Camera Control Board
 - OSD Menu
 - Service Monitor Output
- 12VDC/24VAC Dual Voltage

Construction


- Aluminum Housing(Weatherproof)
- Aluminum Bracket(Wire feed-through)

Technical Specifications NTSC = (N), PAL = (P)

Item	CB-SD21N/P-L
Video Format	NTSC / PAL
Image Sensor	1/3" CCD
Sync System	Internal
Effective Pixels	768(H) x 494(V)(N) / 752(H) x 582(V)(P)
Scanning System	525 Lines. 2:1 Interlaced(N), 625 Lines. 2:1 Interlaced(P)
Electronic Shutter	1/60 ~ 1/120,000 sec.(N), 1/50 ~ 1/120,000 sec.(P)
Main Video Output	1.0 Vp-p Composite, 75 ohm
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
Horizontal Resolution	550 TV Lines
Min. Illumination	0.1 Lux(Color), 0.01 Lux(B/W), 0.002 Lux(DSS On)
S/N Ratio	More than 50dB(AGC Off)
Lens (DC Auto Iris)	Vari-focal: 2.8-10mm
Angle of View	132.1°(W) ~ 36°(T)
Day/Night Function	ICR
36 IR LEDs	LED Distance: up to 100ft.
LED Illumination Angle	60°
Camera Control & Setup	OSD Menu
Operating Temperature	-5°C ~ +45°C
Operating Humidity	Within 90% RH
Weatherproof	IP66
Power Consumption	500mA (Camera) 1 Amp (w/ LED On)
Input Voltage	12VDC/24VAC Dual Voltage

* Must use specified and regulated 12VDC/24VAC power supply.

Dimensions (UNIT: mm)

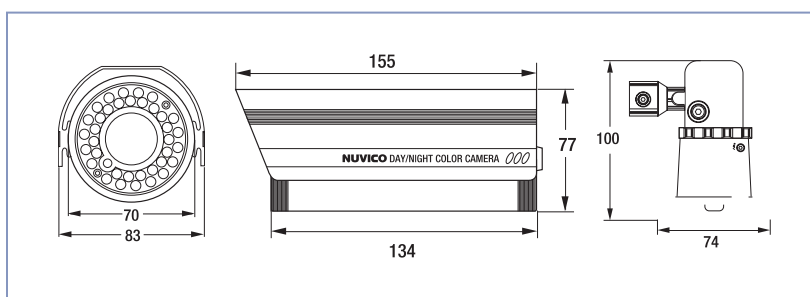

EASYVIEW