

Day/Night Color Bullet Camera



CB-SD3895N-L



Key Features

- 1/3" CCD Sensor
- High Resolution - 550 TV Lines(Color), 600 TV Lines(B/W)
- Day/Night Function with ICR
- 3.8~9.5mm, DC Auto Iris
- 0.1 Lux(Color), 0.01 Lux(B/W), 0.002 Lux(DSS On)
- 36 IR LEDs
- Separate Camera Control Board
 - OSD Menu
 - Service Monitor Output
- 12VDC/24VAC Dual Voltage



Construction

- Aluminum Housing (Weatherproof)
- Aluminum Bracket (Wire Feed-Through)

Super Image Enhancer

Innovative DSP Technology for delivering excellent picture quality in any lighting conditions.

- High Resolution - 550 TV Lines
- Super Low Light Performance
- Super BLC
- Extraordinary Capability for Intelligent Processing

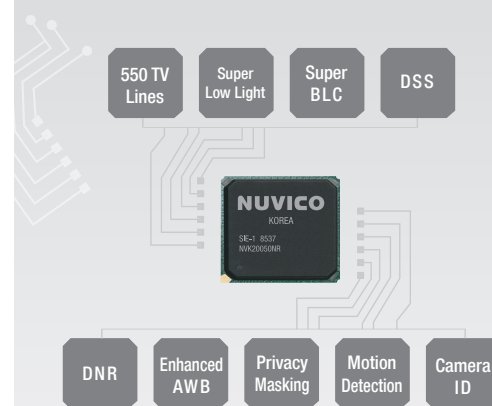

Normal Color Mode in Low Light Condition



Enhanced Color Mode in Low Light Condition



Clear B/W Mode with Day/Night Feature

NUVICO

53 Smith Street, Englewood, NJ 07631
Phone 201-541-1605 Toll Free 866-523-1700 Fax 201-541-1620
sales@nuvico.com www.nuvico.com

NUVICO reserves the right to alter product offers and specification at any time without notice.
NUVICO EasyView and the NUVICO logos are registered trademarks of NUVICO.
Copyright © 2007 NUVICO. All rights reserved.

NUVICO®

Connecting Video Anywhere™

Day/Night Color Bullet Camera




Specifications

Item	CB-SD3895N-L
Video Format	NTSC
Image Sensor	1/3" CCD
Sync System	Internal / Line Lock(Optional)
Effective Pixels	768(H) x 494(V)
Scanning system	525 Lines, 2:1 Interlaced
Electronic Shutter	1/60 ~ 1/100,000 sec.
Main Video Output	1.0 Vp-p Composite, 75 ohm
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
Horizontal Resolution	550 TV Lines (Color), 600 TV Lines (B/W)
Min. Illumination	0.1 Lux(Color), 0.01 Lux (B/W), 0.002 Lux (DSS On)
S/N Ratio	More than 50dB(AGC Off)
Day/Night Function	ICR
36 IR LEDs	LED Distance: up to 100 ft.
Lens (DC Auto Iris)	Vari-focal: 3.8~9.5mm
Camera Control & Setup	OSD Menu
Operating Temperature	-5°C ~ +45°C
Operating Humidity	Within 90% RH
Power Consumption	500mA(Camera) 1Amp (w/LED On)
Power Requirement	12VDC/24VAC Dual Voltage

* Must use specified and regulated power supply.

Dimensions (UNIT: mm)

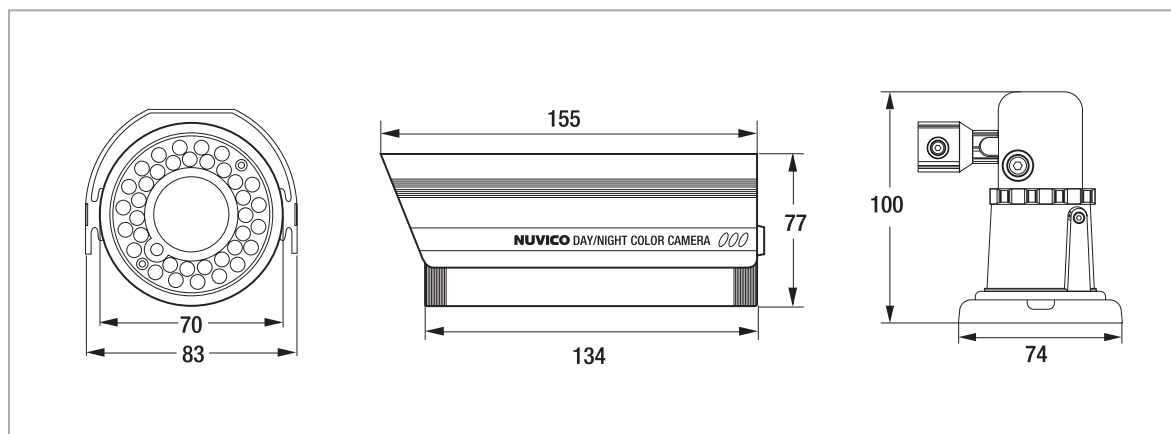

NUVICO

53 Smith Street, Englewood, NJ 07631
Phone 201-541-1605 Toll Free 866-523-1700 Fax 201-541-1620
sales@nuvico.com www.nuvico.com

NUVICO reserves the right to alter product offers and specification at any time without notice.
NUVICO EasyView and the NUVICO logos are registered trademarks of NUVICO.
Copyright © 2007 NUVICO. All rights reserved.

NUVICO®

Connecting Video Anywhere™