


CDA-3080

MULTIPLE INPUT DISTRIBUTION AMPLIFIER, UTP / CAT-5

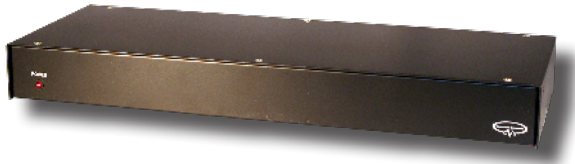


KEY FEATURES:

- Eight 1x3 Distribution amps in each unit
- High quality Color video performance
- UL listed Power Supply
- UTP Ground Loop Blocking Inputs
- Industrial grade specifications
- Made in the USA

The **CDA-3080** has 8 high performance 1x3 Color Video distribution Amplifiers with UTP Ground Loop Blocking inputs in one chassis. Instead of installing 8 separate UTP baluns, use the **CDA-3080** to save space and money. For less than 1x3 operation use only the outputs needed and simply leave the unused ones unterminated. A UL listed power supply is included with the **CDA-3080-A**.

SPECIFICATIONS

Video:		H Tilt:	<1%
Inputs (8):	Composite Video	V Tilt:	<1%
Input Connectors:	2pos. Terminal Strip	Crosstalk Between	
Input Level:	1.0VPP Into 75 ohms	Channels (All Hostile):	>60dB @ 3.58mHz
Input Impedance:	75ohm +/-5%	Power Requirements:	
Outputs (24):	3 Per Input	AC Operation:	Use CVT-1250 Adapter
Output Connectors:	BNC		Supplied With Unit
Output Impedance:	75ohm +/-5%	AC Power:	120VAC +10% / -15% / 60Hz
Gain In/Out:	+/- 3dB Depending On	AC Power Draw:	<2w
	Cable Length	Power Connector:	3.5mm Phono Plug
Diff Gain:	<1%	Mechanical:	
Diff. Phase:	<1°	Size:	19.00"W x 7.0"D x 1.70"H
Frequency Response:	0-15mHz +/- .5dB	Weight:	2.5lbs
Power / Supply Hum:	<63dB		



P.O. Box 749
Peekskill, NY 10566
Phone: (845) 737-7009
Fax: (845) 737-0426
www.compuvideosystems.com

All Specifications Subject To Change Without Prior Notification