

CDA-3160

MULTIPLE INPUT DISTRIBUTION AMPLIFIER, UTP / CAT-5




KEY FEATURES:

- Sixteen 1x3 Dist. amps in each unit
- High quality Color video performance
- UL listed Power Supply
- UTP Ground Loop Blocking inputs
- 2 Rack Units W/Removable Rack Ears
- Proudly made in the USA

The **CDA-3160** has 16 high performance 1x3 color video distribution amplifiers with UTP Ground Loop Blocking inputs in one, rack mountable, chassis. Instead of installing 16 separate UTP baluns, use the **CDA-3160** to save space and money. Great for adding remote access to existing systems. For 1x1 or 1x2 operations, use only the outputs needed and simply leave the leftover ones unterminated. A UL listed power supply is provided with the **CDA-3160**.

SPECIFICATIONS

Video:		H Tilt:	<1%
Inputs (16):	Composite Video	V Tilt:	<1%
Input Connectors:	2pos. Terminal Strip	Crosstalk Between	
Input Level:	1.0VPP Into 75 ohms	Channels (All Hostile):	>60dB @ 3.58mHz
Input Impedance:	75ohm +/-5%	Power Requirements:	
Outputs (48):	3 Per Input	AC Operation:	Use CVT-1280 Adapter
Output Connectors:	BNC		Supplied With Unit
Output Impedance:	75ohm +/-5%	AC Power:	120VAC +10% / -15% / 60Hz
Gain In/Out:	Unity +/- 3dB Variable	AC Power Draw:	<8w
Diff Gain:	<1%	Power Connector:	3.5mm Phono Plug
Diff. Phase:	<1°	Mechanical:	
Frequency Response:	0-15mHz +/- .5dB	Size:	19.00"W x 6.8"D x 3.50"H
Power / Supply Hum:	<63dB	Weight:	2.5lbs

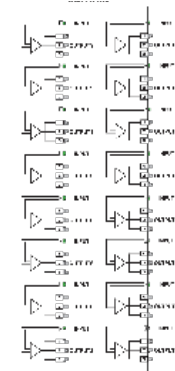

P.O. Box 749
Peekskill, NY 10566
Phone: (845) 737-7009
Fax: (845) 737-0426
www.compuvideosystems.com

All Specifications Subject To Change Without Prior Notification