



CE-L32

32" LCD Monitor

1920 x 1080 (1080p) Resolution

500 nit Brightness

4000:1 Contrast Ratio

HDMI Input

VGA Input

3 BNC Inputs / 1 BNC Output

Rugged Metal Cabinet


Correct Aspect Feature: Does not distort 4:3 camera image in 16:9 resolution

VESA 100 x 100mm and 100 x 200mm

Dual Voltage: 100-240 VAC, 24VDC

DC12V Output for Camera

Dimensions

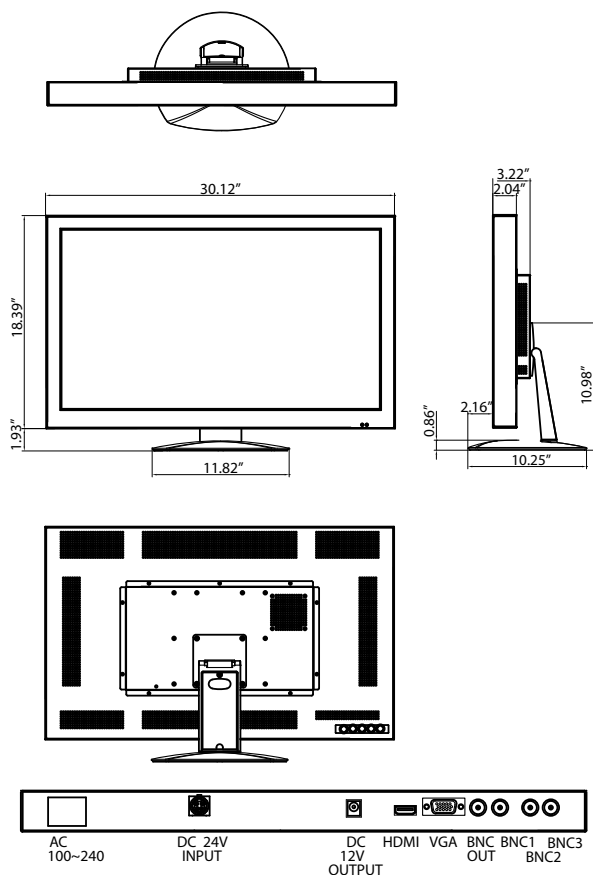

Specifications

LCD Monitor	CE-L32
LCD Panel	32" LCD
Resolution	1920 x 1080
Control	OSD Control Function
LCD Profile Ratio	16:9
Display Colors	16.7M
Brightness	500 nit
Contrast Ratio	4000:1
Viewing Angle	178° (H) x 178° (V)
Response Time	6.5ms (On/Off)
In / Output Impedance	75Ω / Auto Terminal Output
Bracket	VESA 100 x 100mm and 100 x 200mm
Video Input / Output	3 BNC Inputs / 1 BNC Output VGA Input HDMI Input
Power Consumption	140 Watts (DC24V)
Power Requirement	Dual Voltage: 100 ~ 240 VAC, 24VDC
Operating Temperature	32°F ~ 104°F
Dimensions	30.12" (W) x 20.32" (H) x 3.22" (D)
Weight	33.5 lbs.

Information in this document is subject to change

Optional Power Supplies

CE-S320-B 320 Watt Multiple Monitor Power Supply (DC24V)
CE-S600-24-B 600 Watt Multiple Monitor Power Supply (DC24V)

