




Ceiling mount shown attached (not included)

## Features

- Top Mount Allows for no Exposed Cables
- 600 TVL S5 DSP Camera Built-in
- SD-Card Player
- Motion Sensing to Switch from SD-Card to Camera
- Composite Input for External Camera with Selectable Timed Sequencing
- Flashing LED on Front to Attract Attention (On/Off Selectable)
- "Recording in Progress" or "Welcome" Message Selectable
- Includes Remote Control
- Low Voltage (DC24V) Operation
- 2 BNC Loop Outs, 1 BNC In
- UL Listed

## Dimensions

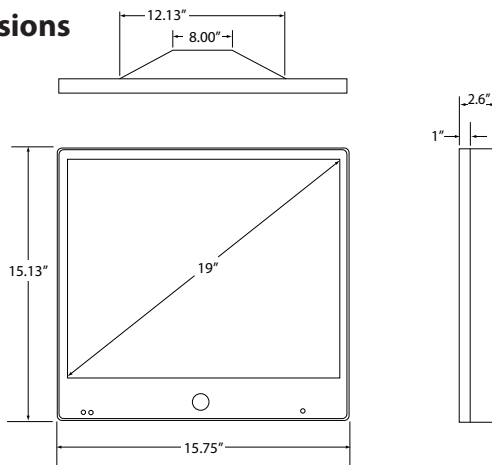

### Optional Power Supply

CE-S320-B	320 Watt Multiple Monitor Power Supply (DC24V)
CE-S600-24-B	600 Watt Multiple Monitor Power Supply (DC24V)
CE-PS200	120 Watt Single Monitor Power Supply (DC24V)

### Optional Mounts

CE-174C	LCD or PVM Wall Mount Bracket
CE-CG-2x2.5	Suspended Ceiling Bracket
CE-CM-SX-6	Adjustable Telescoping Ceiling Mount (3' to 5'6")
CE-CM-LX-12	Adjustable Telescoping Ceiling Mount (6' to 11'6")
CE-CM-LX-17	Adjustable Telescoping Ceiling Mount (6' to 17')
CE-175FB	Adjustable Ceiling Mount (3' 6" to 6'3")
CE-778	Multiple Option Mount Bracket
CE-178A	Articulating Wall Mount Bracket

## CE-M19S-B

### 19" Public View Monitor

The CE-M19S-B Public View Monitor features a slim styled design with a recessed acrylic face to be an elegant showpiece while actively taking part of loss prevention and creating awareness of video surveillance. The CE-M19S-B has advanced features that allow you to switch between the internal camera and an SD-Card player or a combination of these.

## Specifications

LCD Monitor	CE-M19S-B
<b>LCD Panel</b>	19" Backlit LCD
<b>Resolution</b>	1280 x 1020
<b>LCD Profile Ratio</b>	4:3
<b>Display Colors</b>	16.7M (8 bit)
<b>Brightness</b>	400 nit
<b>Contrast Ratio</b>	1000:1
<b>Viewing Angle</b>	178° (H) x 178° (V)
<b>Response Time</b>	5ms
<b>Bracket</b>	VESA 100mm
<b>Video Output</b>	2 BNC Loop Outs
Camera	
<b>Image Sensor</b>	1/3 Inch Sony CCD
<b>Resolution</b>	600 TV Lines
<b>Effective Pixels</b>	768 (H) x 494 (V)
<b>Scanning System</b>	600 Lines, Interlace
<b>S/N Ratio</b>	48dB
<b>Sync System</b>	Internal / Line Lock
<b>Scanning Frequency</b>	15.734 KHz (H), 59.94 Hz (V)
<b>Minimum Illumination</b>	0.3 Lux / 0.1 Lux B&W
<b>Shutter Speed</b>	1/60 ~ 1/100,000 sec.
<b>Dynamic Range</b>	62dB (Max.)
<b>Iris Control</b>	DC / Video
<b>Lens</b>	2.8 ~ 10mm F1.2 Vari-Focal
<b>Video Output</b>	1.0 Vp-p, 75 Ω
Unit As A Whole	
<b>Power Consumption</b>	45 Watts
<b>Power Requirement</b>	DC24V
<b>Dimensions</b>	15.75" (W) x 15.13" (H) x 1"edge - 2.6"center (D)
<b>Weight</b>	13 lbs.

Information in this document is subject to change

