




CE-VF54IR

IR Bullet Camera

- SONY 1/3" CCD (Super HAD)
- 600 TVL Resolution
- 42 IR LEDs
- 2.8 ~ 12mm (F1.2) Lens (Externally Adjustable)
- NX3 Digital Signal Processor
- Smart-IR Function
- Digital Noise Reduction (DNR)
- Sense Up Feature for Optimal Night Image
- Digital Wide Dynamic Range (D-WDR)
- High Light Compensation (HLC)
- OSD Menu Control via CE-REMOTE
- Cable Through Bracket Design with Mounting Plate
- Weather Resistant
- DC12V / AC24V

Dimensions

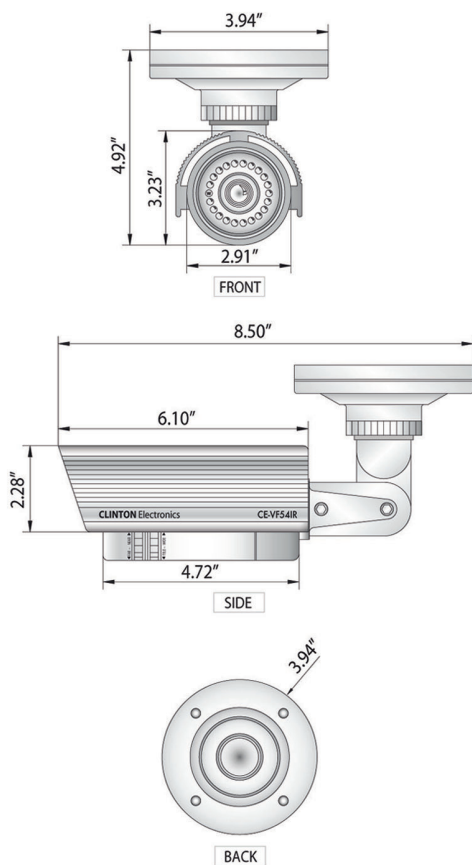

Recommended Power Supply

CE-T12VDC1000	1 Camera 1000mA DC12V
CE-T24VAC800	1 Camera 20 watt AC24V
CE-T24VAC2000	1 Camera 50 watt AC24V

All Clinton Multi Camera Power Supplies

Optional Accessories

CE-REMOTE

- Plugs directly into Camera
- Adjusts OSD Functions
- Test Monitor Connection

Specifications

Camera	CE-VF54IR
Image Sensor	1/3 Inch SONY (Super HAD) CCD
Resolution	600 TV Lines
IR LEDs	42 pcs
Effective Pixels	768 (H) x 494 (V)
Scanning System	2:1 Interlace
S/N Ratio	More than 50dB
Sync System	Internal
Minimum Illumination	0.1 Lux
Shutter Speed	1/60 ~ 1/100,000 sec.
Lens	2.8 ~ 12mm Vari-Focal F1.2
Video Output	1.0 Vp-p, 75Ω
Power Consumption	Max. 650mA (DC12V) with IR LEDs ON Max. 260mA (AC24V) with IR LEDs ON
Power Requirement	DC12V / AC24V
Operating Temperature	-20°F ~ 122°F
Weather Rating	IP67
Operating Humidity	Within 90% RH
Dimensions	8.50" (L) x 4.92" (H) x 3.94" (W)
Weight	3.30 lbs.
OSD Menu	Control with CE-REMOTE
Lens	DC Video
Exposure	Shutter / AGC / Sens-Up / BLC / D-WDR
Back Light	Off / BLC / HSBLC
White Balance Control	ATW / AWB / AWC->SET / Manual
Day / Night	Color / B&W / Auto
3DNR	Off / On
Special	Cam Title / D-Effect / Motion / Privacy / Defect
Adjust	Sharpness / Monitor

Information in this document is subject to change

