




## Dimensions

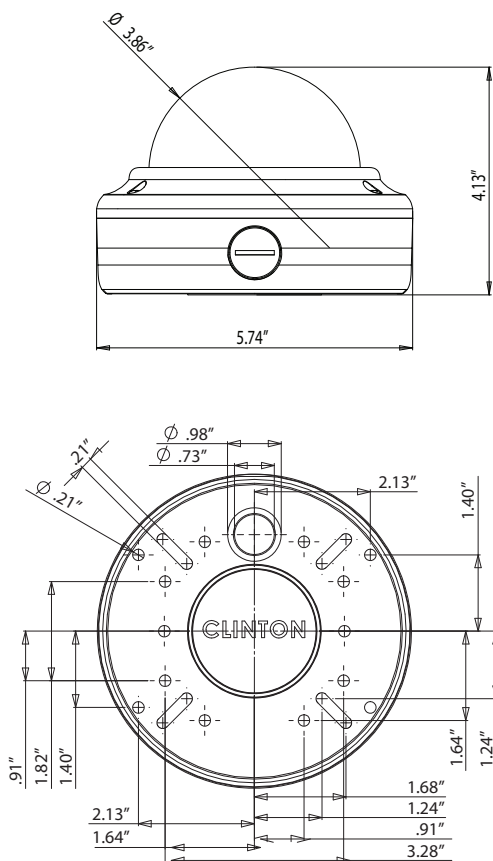

### Recommended Power Supply

## All Clinton Electronics Power Supplies

## Optional Accessories

CE-VXWBB

CE-VXRB

CE-VXRW

CE-REMOTE

- Plugs directly into Camera
- Adjusts OSD Functions
- Test Monitor Connection

Wall Mount Bracket (in Black)

Black Rubber Vandal X Dome Cover

White Rubber Vandal X Dome Cover

# CE-VX30B

## Vandal X True Day/Night Dome Camera (in Black)

- SONY 1/3" CCD (Super HAD)
- 600TVL Resolution
- 2.8 ~ 12mm (F1.2) Lens
- 33 Built-in IR LEDs
- Built-in Heater
- True Day/Night Cut Filter (Lens Type)
- NX3 Digital Signal Processor
- Smart-IR Function
- Digital Noise Reduction (DNR)
- Digital Wide Dynamic Range (D-WDR)
- Sense Up Feature for Optimal Night Image
- High Light Compensation (BLC)
- OSD Menu Control (Built-in Joystick or CE-REMOTE)
- 3-Axis Adjustment
- DC12V / AC24V
- UL Listed

## Specifications

| Camera                       | CE-VX30B                                         |
|------------------------------|--------------------------------------------------|
| <b>Image Sensor</b>          | 1/3 Inch SONY (Super HAD) CCD                    |
| <b>Resolution</b>            | 600 TV Lines                                     |
| <b>IR LEDs</b>               | 33 pcs                                           |
| <b>Effective Pixels</b>      | 768 (H) x 494 (V)                                |
| <b>Scanning System</b>       | 2:1 Interlace                                    |
| <b>S/N Ratio</b>             | 52dB                                             |
| <b>Sync System</b>           | Internal                                         |
| <b>Scanning Frequency</b>    | 15.734 KHz (H), 59.94 Hz (V)                     |
| <b>Minimum Illumination</b>  | 0.00001 Lux / F1.2 (Sens-Up x 258)               |
| <b>Shutter Speed</b>         | 1/60 ~ 1/100,000 sec.                            |
| <b>Dynamic Range</b>         | 62dB (Max.)                                      |
| <b>Lens</b>                  | 2.8 ~ 12mm (F1.2) w/True D/N Filter              |
| <b>Video Output</b>          | 1.0 Vp-p, 75Ω                                    |
| <b>Power Consumption</b>     | Max. 300mA (AC24V), Max. 810mA (DC12V)           |
| <b>Power Requirement</b>     | DC12V / AC24V                                    |
| <b>Operating Temperature</b> | -20°F ~ 122°F                                    |
| <b>Weather Rating</b>        | IP 68                                            |
| <b>Dimensions</b>            | 5.74" (Dia.) x 4.13" (H)                         |
| <b>Weight</b>                | 2.75 lbs.                                        |
| <b>OSD Menu</b>              | <b>Control with OSD Joystick or CE-REMOTE</b>    |
| <b>Lens</b>                  | DC                                               |
| <b>Exposure</b>              | Shutter / AGC / Sens-Up / BLC / D-WDR            |
| <b>Back Light</b>            | Off / BLC / HSBLC                                |
| <b>White Balance</b>         | ATW / AWB / AWC-SET / Manual                     |
| <b>Day / Night</b>           | S-IR / Color / B&W / Auto                        |
| <b>3DNR</b>                  | Off / On                                         |
| <b>Special</b>               | Cam Title / D-Effect / Motion / Privacy / Defect |
| <b>Adjust</b>                | Sharpness / Monitor                              |

Information in this document is subject to change

