

CF-S1N/P



* Lens not included

Key Features


- 1/3" CCD Sensor
- 550 TV Lines
- 0.1 Lux(Color), 0.002 Lux(DSS On)
- OSD Menu
- C/CS Mount
- 12VDC/24VAC Dual Voltage

Technical Specifications NTSC = (N), PAL = (P)

Item	CF-S1N/P
Video Format	NTSC / PAL
Image Sensor	1/3" CCD
Sync System	Internal
Effective Pixels	768(H) x 494(V)(N) / 752(H) x 582(V)(P)
Scanning system	525 Lines. 2:1 Interlaced(N), 625 Lines. 2:1 Interlaced(P)
Electronic Shutter	1/60 ~ 1/120,000 sec.(N), 1/50 ~ 1/120,000 sec.(P)
Main Video Output	1.0 Vp-p Composite, 75 ohm
Service Monitor Output	1.0 Vp-p Composite, 75 ohm
Horizontal Resolution	550 TV Lines
Min. Illumination	0.1 Lux(Color), 0.002 Lux(DSS On)
S/N Ratio	More than 50dB(AGC Off)
Camera Control & Setup	OSD Menu
Lens Mount Type	C/CS
Operating Temperature	-5°C ~ +45°C
Operating Humidity	Within 90% RH
Power Consumption	500mA
Input Voltage	12VDC/24VAC Dual Voltage

* Must use specified and regulated 12VDC/24VAC power supply.

Dimensions (UNIT: mm)

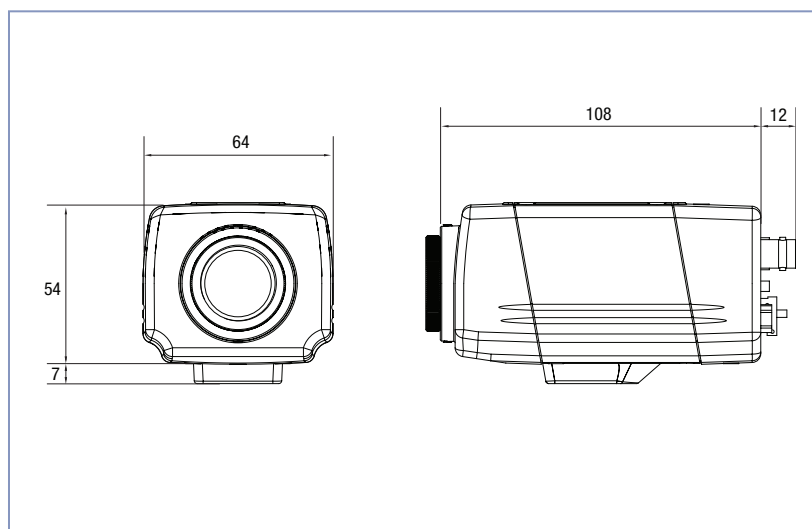

NEW! Available Sept. 2008