




Features

- 1/3" Color Sony Super HAD II CCD
- 540 TV lines, 0.1 lux
- Digital Wide Dynamic function
- Basic Day/Night (not IR sensitive)
- On Screen Display (OSD)
- 12VDC / 24VAC
- 3-year warranty



DN BASIC
DAY / NIGHT

Model	CLD54D
Image Sensor	1/3" Interline Transfer Sony Super II HAD CCD
TV System	NTSC
Picture Elements (pixels)	768 (H) × 494(V)
Horizontal Resolution	540 TV Lines
Min. Illumination	0.1 lux
Signal to Noise Ratio	More than 48dB
Synchronizing System	Internal
Video Output	1Vp-p 75ohm
Auto-Iris Drive	DC or Video Type (4-pin square connector)
White Balance	ATW / AWC / Manual
Electronic Iris	1/60-1/100,000 - On/Off Selectable
BLC (Backlight Compensation)	On/Off Selectable (5 zones)
AGC (Automatic Gain Control)	0 - 18 - 24 - 32dB selectable
Digital Wide Dynamic Range (WDR)	On/Off Selectable
Privacy Masking	On/Off Selectable (4 programmable zones)
Day/Night Function	Color / B&W / Auto (camera is not IR sensitive)
Power Requirement	12VDC/24VAC ±10%, 250mA Max
Operating Condition	+14 ~ 122°F (-10°C ~ +50°C) Within 85% RH
Lens Mount	CS/C (C-mount adapter included) with Cam-type Backfocus Adjustment
Dimensions – w/h/d	1.9 × 1.9 × 3.3 inches (47 × 47 × 83mm)
Weight / Color	7.1 oz. (200g) / Ivory
Included Accessories	CS/C mount adapter, 4-pin iris connector

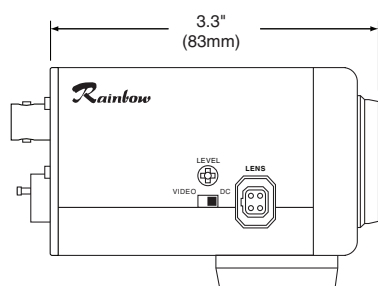

Backfocus Mode™
for easy, one touch
backfocusing. No
filters or numerous
adjustments for lens/
camera setup. Push
the button, focus the
lens and you're done!