

# CLTS-4

## SEQUENTIAL, LOOPING & TERMINATING VIDEO SWITCHER




### KEY FEATURES:

- High quality Video Performance
- Compact Size: 1.70"H x 5.00"W x 7.5"D
- Made in USA
- High quality Construction
- UL listed power supply

The **CLS-4** is a high performance 4x1 composite video sequential switcher. The switcher is designed to handle up to four high resolution color video sources and uses an external UL listed power supply to meet today's safety requirements. Switching occurs during the vertical interval to minimize monitor roll.

## SPECIFICATIONS

Video:		Power Requirements:	
Input Impedance:	10K Ohms Looping	Power:	UL Listed 12VDC Power
Output Impedance:	75 Ohms		Adapter (Supplied)
Max Video Input:	2vpp	Input Voltage:	13.5 To 18 VDC Isolated
Frequency Response:	15mHz +/- 0.7dB		Ground
Gain:	Unity +/- 3%	Power Consumption:	1 Watt
Differential Gain:	<0.5%	Mechanical:	
Differential Phase Error:	<0.5 Degrees	Connectors:	BNC
Max H Tilt:	<1%	Power Connector:	3.5mm Phono, Center +
Max V Tilt:	<1%	Height:	1.70"
Operational:		Width:	5.00"
Switches (4):	3 Position Toggle Switch	Depth:	8.00"
Indicators (4):	LED Lamp For Each Input		
Sequence Interval:	Variable: 1 sec. To 90 sec.		

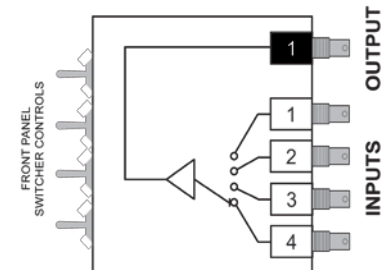

P.O. Box 749  
Peekskill, NY 10566  
Phone: (845) 737-7009  
Fax: (845) 737-0426  
[www.compuvideosystems.com](http://www.compuvideosystems.com)

**All Specifications Subject To Change Without Prior Notification**