

## COVERT COLOR CAMERA

### MULLION CAMERA

CMH28PB  
CMH28PS  
CMH28PZ



- ▶ High-Resolution 540TVL Color Camera
- ▶ 1/3" Sony Super HAD CCD
- ▶ 130° Wide-Angle 2.8mm Lens
- ▶ Standard BNC / Power-Pin Connections
- ▶ 12VDC Power Supply Included
- ▶ Available in Black, Silver, or Bronze Case Color Options
- ▶ Detailed View of Customer Exiting the Premises
- ▶ Superior to Overhead Camera Views that can Hamper Facial Recognition

# MULLION CAMERA





# CMH28PB / CMH28PS / CMH28PZ

SPECIALTY  
CAMERA SERIES

## SPECIFICATIONS

MODEL		CMH28PB ~ 540 TVL Color Camera, Black Case
MODEL		CMH28PS ~ 540 TVL Color Camera, Silver Case
MODEL		CMH28PZ ~ 540 TVL Color Camera, Bronze Case
POWER	Power Source	12VDC +/-10%
	Power Consumption	Max 1.5 Watts
GENERAL	Image Sensor	1/3" Sony Super HAD CCD
	Total Pixels	811(H) x 507(V)
	Scanning System	NTSC
	Scanning Frequency	15.734KHz(H), 59.94Hz(V)
	Sync. System	Internal
	Electronic Shutter	1/60 ~ 1/100,000 sec.
	Resolution	540TVL
	Min. Illumination	0.25 lux @ F1.2, 50 IRE
	Video Output	1.0 Vp-p (75-ohm, Composite)
	S/N Ratio	>50dB (AGC off)
FUNCTION	Auto Exposure	ON
	White Balance	ATW Fixed
	Gain Control	Auto
	Gamma	0.45
	BLC	ON
CONNECTOR	Power Input	DC JACK, 2.1mm
	Video Output	BNC connector
	Lens Mount	Fixed mount
	Lens	2.8mm
	Operating Temperature	14°F ~ 104°F (-10° ~ 40°)
	Operating Humidity	0 ~ 96% (non-condensing)
	External Dimension (W x H x D)	1.73 x 1.73 x 1.38 inches 44 x 44 x 35 mm
	Weight	2.3oz, 65g
	Shipping Weight	2 lbs (0.9kg)
	Standards Compliance	FCC, cULus, RoHS

## DIMENSIONS

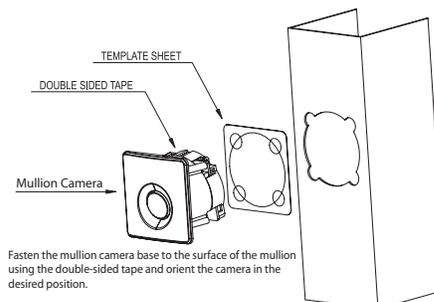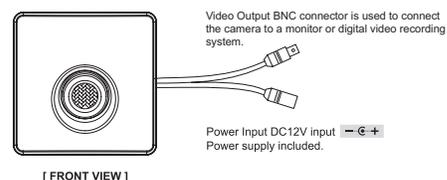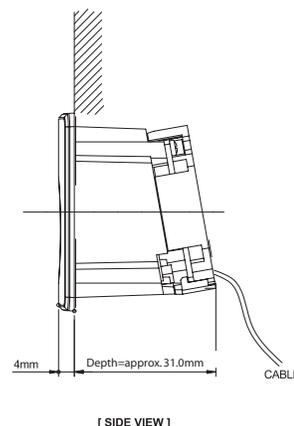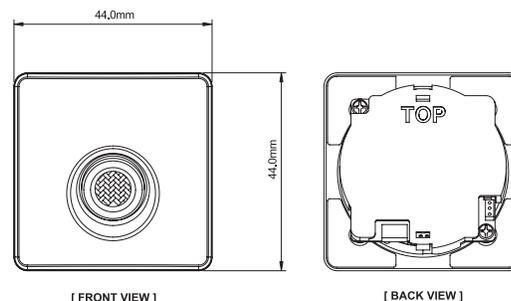

## Accessories

P3DC12-8-10CB Power Supply, 8 channel, 12VDC, 10A Circuit Breaker  
PS12V Power Supply, 12VDC, 300ma, 2.1mm power plug