




CVC5815DNV	2.8 -12mm auto iris varifocal lens, grey housing
CVC5815DNVW	2.8 -12mm auto iris varifocal lens, white housing
CVC5915DNV	5 - 50mm auto iris varifocal lens, grey housing
CVC5915DNVW	5 - 50mm auto iris varifocal lens, white housing

Features

- 1/3" Sony Super-HAD II™ CCD
- 3D-DNR (sense-up) - sharp image under ultra low light level
- Intense-IR function - non saturation image, vivid image
- Defect function - elimination of white spots
- HSBLC (High Light Suppression BLC)
- Privacy zone
- Two heaters to stop condensation
- Third-Generation DSP chip
- ICR - Removable IR cut filter
- Convenient on-screen display (OSD) function controls
- 32x digital zoom
- External control rings for easy focus and distance adjustment
- 12VDC / 24VAC dual voltage operation
- 5 year warranty

Specifications

Image Sensor	1/3" Sony Super-HAD II™ CCD	Freeze	On / Off
Resolution.....	600 TV lines	Day & Night	Color / BW / Auto
Minimum Illumination.....	0.000006 lux (IR LEDs on)	Digital Zoom	On (32x) / Off
IR Range	Up To 65'	Blemish Compensation.....	256 point (even 128 point, odd 128 point)
White Balance	ATW / AWB / Manual / AWC - Set	Power Consumption	IR LEDs on: 500mA max.
Gain Control	High / Middle / Low / Off	Power Supply	12VDC / 24VAC (dual voltage) (power supply not included)
S/N Ratio	52dB (AGC off, Weight on)	Operating Temperature/	
Backlight Compensation.....	BLC / HSBLC / Off	Humidity.....	14° F - 122° F / RH 95% max.
Effective Pixels	768 (H) x 494 (V)	Storage Temperature/	
Electronic Shutter Speed.....	Auto (1/50 sec., 1/60 sec. - 1/100,000 sec.)	Humidity.....	-4° F - 140° F / RH 95% max.
OSD	Built-in	Dimensions.....	3.94" (W) x 4.13" (H) x 8.74" (L)
3 DNR.....	On / Off (0-100 levels adjustable)	Weight	3.53 lbs.
D-WDR	Indoor / Outdoor / Off		
Sharpness	0 - 31' (level adjustable)		
Privacy.....	On / Off (8 zones)		
Total Pixels	811 (H) x 508 (V)		
Scanning System.....	2:1 interlace		
Synchronization.....	Internal / Line-Lock		
Motion Detection.....	On / Off (4 zones)		
Sense-Up.....	Off / Auto (selectable limit x2 - x256)		
Mirror	Mirror / V-Flip / Rotate / Off		

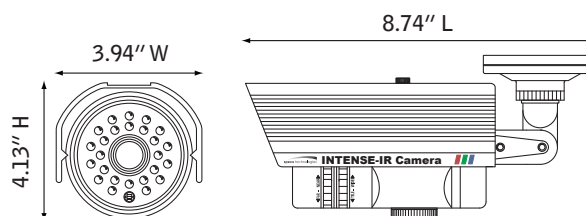

Optional Accessories



CVCJBB
Bullet Camera
Junction Box



INTJBS
Square Junction Box



INTCM
Corner/Pole Adaptor



PSW4
Power Supply



PSW5
Power Supply

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 2/2/12

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com