

CVCM155

CVCM155R

(Reverse Image Camera)




155° Wide Angle Mobile Camera with Hanging Bracket

CVCM160

CVCM160R

(Reverse Image Camera)



160° Wide Angle Flush Mount Mobile Camera


Features

- High Quality Color Camera
- 155° / 160° Wide Viewing Angle
- 0.1 Lux Minimum Illumination
- Aluminum Die-Cast Housing
- Small & Compact Design
- Waterproof Camera and Cable


Specifications

- 1/4" image sensor
- 380 TV lines resolution
- Pixels: 270K (656 x 494)
- Lens: 155° / 160° : 120° (H) 89.1° (V)
- 0.1 lux minimum illumination
- Video Out: 1.0V p-p composite, 75 Ohm
- S/N Ratio: more than 42dB
- Current Consumption: 80mA max. (CVCM155) / 70mA max. (CVCM160)
- Operating Voltage: 12V DC: 7V ~ 16V (CVCM155) / 5V ~ 18V (CVCM160)
- Operating Temperature: -22°F ~ 158°F
- Weight: 3 ounces


CVCM155 Dimensions

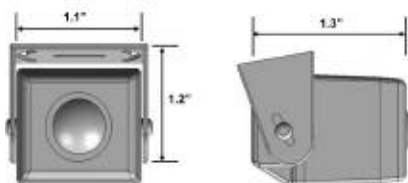

CVCM160 Dimensions

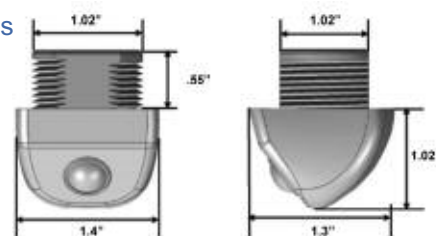

Installation

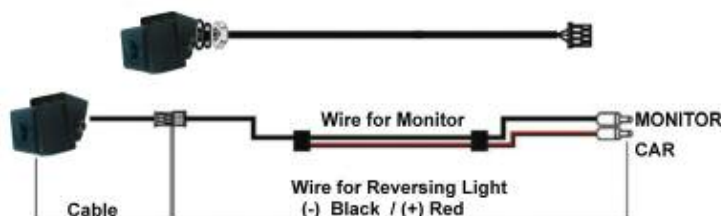

Speco Technologies is constantly developing product improvements.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 4/1/10

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880

www.specotech.com