

DA-112

SINGLE INPUT DISTRIBUTION AMPLIFIER, COAX




KEY FEATURES:

- Single 1x12 Distribution amp in each unit
- High quality Color video performance
- Compact size
- Made in the USA
- Differential input
- Industrial grade specifications
- UL listed Power Supply

The **DA-112** is a differential input, high performance 1x12 Color Video distribution Amplifier in a compact chassis. Instead of installing multiple DA's, use the **DA-112** to save space and money. The differential input amplifiers are used to minimize or eliminate ground loop problems. For less than 1x12 operation use only the outputs needed and simply leave the unused ones unterminated. A UL listed power supply is included with the **DA-112**.

SPECIFICATIONS

Video:		H Tilt:	<1%
Inputs (1):	Composite Video	V Tilt:	<1%
Input Connectors:	BNC	Crosstalk Between CH:	>60dB @ 3.58mHz
Input Level:	1.0VPP Into 75 ohms	CCMR:	Typ. 60dB @ 4mHz
Input Impedance:	75ohm +/-5%	Power Requirements:	
Outputs (12):	12 Per Input	AC Operation:	Use CVT-1250 Adapter
Output Connectors:	BNC		Supplied With Unit
Output Impedance:	75ohm +/-5%	AC Power:	120VAC +10% / -15% / 60Hz
Gain In/Out:	Unity +/-3dB Variable	AC Power Draw:	<2w
Diff Gain:	<1%	Power Connector:	3.5mm Phono Plug
Diff. Phase:	<1°	Mechanical:	
Frequency Response:	0-15mHz +/- .5dB	Size:	8.00"W x 8.5"D x 1.65"H
Power / Supply Hum:	<63dB	Weight:	1.5lbs
		Operating Temp Range:	0-40°C With Provided Power Supply
			-35-80°C Without Provided Power
			Supply

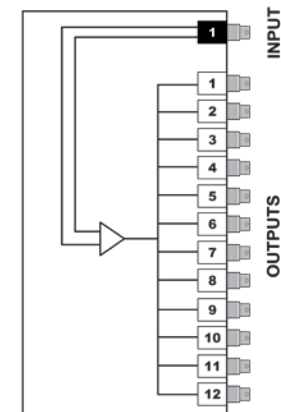

P.O. Box 749
Peekskill, NY 10566
Phone: (845) 737-7009
Fax: (845) 737-0426
www.compuvideosystems.com

All Specifications Subject To Change Without Prior Notification