

# DA-26

## MULTIPLE INPUT DISTRIBUTION AMPLIFIER, COAX




### KEY FEATURES:

- Two 1x6 Distribution amps in each unit
- High quality Color video performance
- Compact size
- Made in the USA
- Differential inputs
- Industrial grade specifications
- UL listed Power Supply

The **DA-26** has two Differential input, high performance 1x6 Color Video distribution Amplifiers in a single compact chassis. Instead of installing multiple isolated DA's, use the **DA-26** to save space and money. The differential input amplifiers are used to minimize or eliminate ground loop problems. For less than 1x6 operation use only the outputs needed and simply leave the unused ones unterminated. A UL listed power supply is included with the **DA-26**.

### SPECIFICATIONS

Video:		Power / Supply Hum:	<63dB
Inputs (1):	Composite Video	H Tilt:	<1%
Input Connectors:	BNC	V Tilt:	<1%
Input Level:	1.0VPP Into 75 ohms	Power Requirements:	
Input Impedance:	75ohm +/-5%	AC Operation:	Use CVT-1250 Adapter
Outputs (6):	6 Per Input		Supplied With Unit
Output Connectors:	BNC	AC Power:	120VAC +10% / -15% / 60Hz
Output Impedance:	75ohm +/-5%	AC Power Draw:	<2w
Gain In/Out:	Unity +/- 3dB Variable	Power Connector:	3.5mm Phono Plug
Diff Gain:	<1%	Mechanical:	
Diff. Phase:	<1°	Size:	5.00"W x 7.5"D x 1.70"H
Frequency Response:	0-15mHz +/- .5dB	Weight:	1.5lbs
		Operating Temp Range:	0-40°C With Provided Power Supply
			-35-80°C Without Provided Power
			Supply

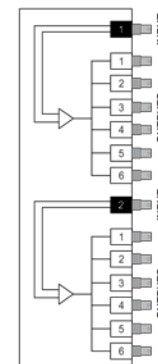

P.O. Box 749  
Peekskill, NY 10566  
Phone: (845) 737-7009  
Fax: (845) 737-0426  
[www.compuvideosystems.com](http://www.compuvideosystems.com)

**All Specifications Subject To Change Without Prior Notification**