

# DA-4800

## SINGLE INPUT DISTRIBUTION AMPLIFIER, COAX




### KEY FEATURES:

- 1x48 Distribution amp in each unit
- Industrial grade specifications
- UL listed Power Supply
- High quality Color video performance
- Compact size
- Made in the USA

The **DA-4800** is a high performance 1x48 Color Video distribution Amplifier in a compact chassis. Instead of installing multiple DA's, use the **DA-4800** to save space and money. For less than 1x48 operation use only the outputs needed and simply leave the unused ones unterminated. A UL listed power supply is included with the **DA-4800**.

## SPECIFICATIONS

Video:		H Tilt:	<1%
Inputs (1):	Composite Video	V Tilt:	<1%
Input Connectors:	BNC	Crosstalk Between	
Input Level:	1.0VPP Into 75 ohms	Channels (All Hostile):	>60dB @ 3.58mHz
Input Impedance:	75ohm +/-5%	Power Requirements:	
Outputs (48):	48 Per Input	AC Operation:	Use CVT-12800 Adapter
Output Connectors:	BNC		Supplied With Unit
Output Impedance:	75ohm +/-5%	AC Power:	120VAC +10% / -15% / 60Hz
Gain In/Out:	Unity +/- 3dB Variable	AC Power Draw:	<2w
Diff Gain:	<1%	Power Connector:	3.5mm Phono Plug
Diff. Phase:	<1°	Mechanical:	
Frequency Response:	0-15mHz +/- .5dB	Size:	19.0"W x 6.8"D x 3.50"H
Power / Supply Hum:	<63dB	Weight:	2.5lbs
		Operating Temp Range:	0-40°C With Provided Power Supply
			-35-80°C Without Provided Power
			Supply

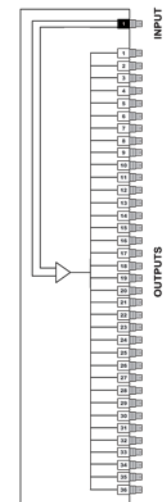

P.O. Box 749  
Peekskill, NY 10566  
Phone: (845) 737-7009  
Fax: (845) 737-0426  
[www.compuvideosystems.com](http://www.compuvideosystems.com)

**All Specifications Subject To Change Without Prior Notification**